

Neles™ pneumatic cylinder actuators Series B1

Neles double acting and spring return B1-series piston type actuators are designed for use in both modulating control and on-off service. The series B1C and B1J are designed to ISO 5211/1 when Neles linkages are utilized. These actuators offer an extremely long cycle life and are well suited to operate almost any type of rotary valve.

When “stay put” is the requirement, the double acting B1C series is the choice. This series is available in several sizes with torque outputs from 40 Nm to 100 000 Nm (29.5 lbf ft to 73 756 lbf ft) for maximum supply pressure of 10 bar (145 psi). If a failure mode is required, the spring return B1J series should be selected. This line offers a self-contained spring cartridge to provide failure in either the open or closed position. These actuators offer torque outputs from 25 Nm to 12 000 Nm (18.5 lbf ft to 8851 lbf ft) for maximum supply pressure of 8.5 bar (124 psi).

Adjustable travel stops

As with any Neles pneumatic/hydraulic actuator, adjustable travel stops are standard for both the open and closed positions. End of stroke turning angle range is 85° to 95°. Optional travel stops 0° to 90° are also available.

Wear resistant bearings

High quality bearings provide support on the upper and lower portions of the lever arm to reduce friction and expand the life of both the lever arm and the housing.

Corrosion resistance

The epoxy painted actuators have housings of rugged cast iron, with light-weight aluminum cylinders anodized for added corrosion resistance. Travel stops are stainless steel. The default IP66 ingress protection class can be upgraded to IP66M or IP67M with additional tubing.

Self-contained spring cartridge

The springs in the B1J actuator are contained in a cartridge for added reliability and easy maintenance.

Spring to open or close capability

The standard spring return actuator on the ball valve can provide spring-to-close or spring-to-open operation simply by changing the mounting position by 90°. On a high performance butterfly valve, the standard unit offers spring-to-close operation. An optional B1JA model is available for spring-to-open requirements.



Design life

The B1-series is engineered for long-term reliability and features an industry-leading 25 years design life, which aligns with requirements of modern process plants, where minimized downtime, and predictable maintenance planning are key values.

High-and-low temperature construction

The standard unit can be used in temperatures up to 70 °C (158 °F). High temperature construction is available for temperatures up to 120 °C (248 °F). The standard unit can be used down to -20 °C (-4 °F). A low temperature design is available for -40° to +70 °C (-40° to 158 °F), arctic service please refer type coding.

High cycle option

For applications where very fast and high frequency operation is required.

ATEX compatibility

Actuator construction ATEX approved.

Oversized cylinder options

The oversized cylinders (B1C 60, 75, 602, 752) are used whenever the supply pressure is limited, thus the actuators can achieve the required torques with a lower supply pressure level.

Override options

Available override devices include a manual centerpiece handle, a manual handwheel override, a manual hydraulic override for high torque applications, and a declutchable manual override (BMO-series), which is sandwich-type mounted between the B1 actuator and the valve.

Emergency shut-down

Emergency Shut-Down (ESD) valves utilizing B1J actuators are offered to assure operation in the event of a fire or plant malfunction. The ESD device enables valve operational testing without cycling, see bulletin 6B21.

Lock-out device

Mechanical lock-outs are available to lock the actuator in either the open or closed position, when security considerations are necessary.

Accessories and control devices

A variety of accessories are available including positioners and limit switches, position indicators, solenoid valves, transducers, relays, boosters and volume tanks etc.

Double acting actuator, series B1C

The B1C-series actuator is designed for quarter-turn action for control as well as for on-off services. The double-acting cylinder actuator is pneumatically operated. The linkage provides an output characteristic that surpasses the nominal torque at the starting point ($\beta = 0^\circ$).


Applications: E.g. Quarter-turn valves. Compressor anti-surge and recirculate controls. Damper drivers equipped with rack, shaft and lever arm.

Technical data


Actuator type	Cylinder bore mm/inch	Swept volume liters/in ³	Maximum shaft bore mm/inch	Maximum operating pressure bar/psi
B1C6	80/3.15	0.33/20	25/0.98	8.5/120
B1C9	100/3.94	0.60/37	35/1.38	8.5/120
B1C11	125/4.92	1.10/67	40/1.57	8.5/120
B1C13	160/6.30	2.30/140	55/2.17	8.5/120
B1C17	200/7.87	4.30/262	55/2.17	8.5/120
B1C20	200/7.87	5.40/329	70/2.76	10/145
B1C25	250/9.84	10.50/640	95/3.74	10/145
B1C32	315/12.40	21/1280	105/4.13	10/145
B1C40	400/15.75	43/2620	120/4.72	10/145
B1C50	500/19.69	84/5130	135/5.31	10/145
B1C60	600/23.62	121/7380	135/5.31	8.5/120
B1C75	750/29.53	189/11500	135/5.31	5/70
B1C502	500/19.69	195/11900	180/7.09	10/145
B1C602	600/23.62	282/17200	180/7.09	8.5/120
B1C752	750/29.53	441/26900	180/7.09	5/70

Exploded views and parts lists

Actuator B1C 6

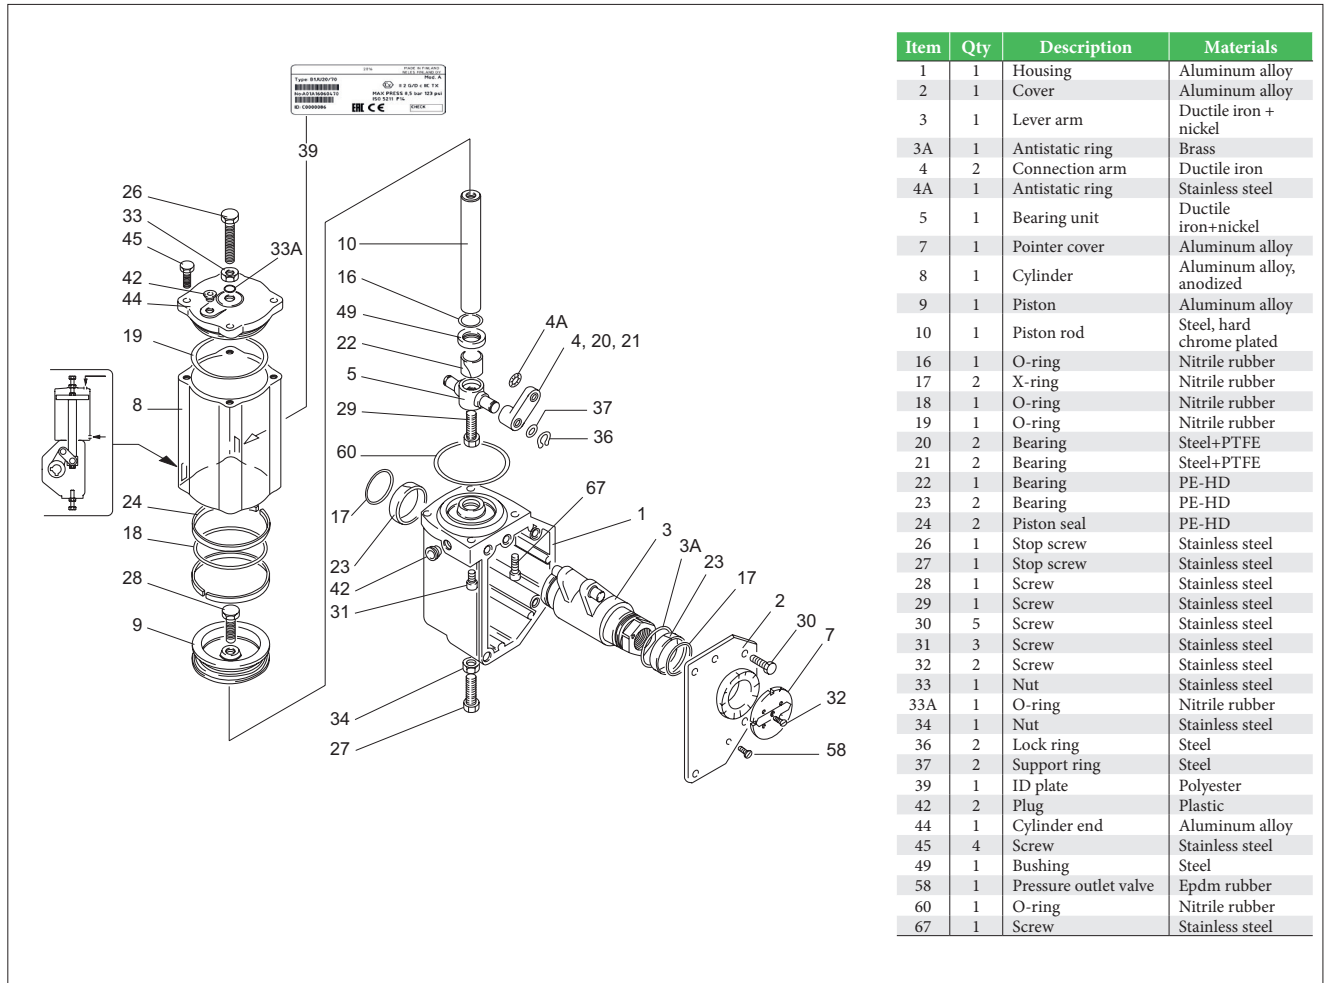


Actuators B1C 9-32

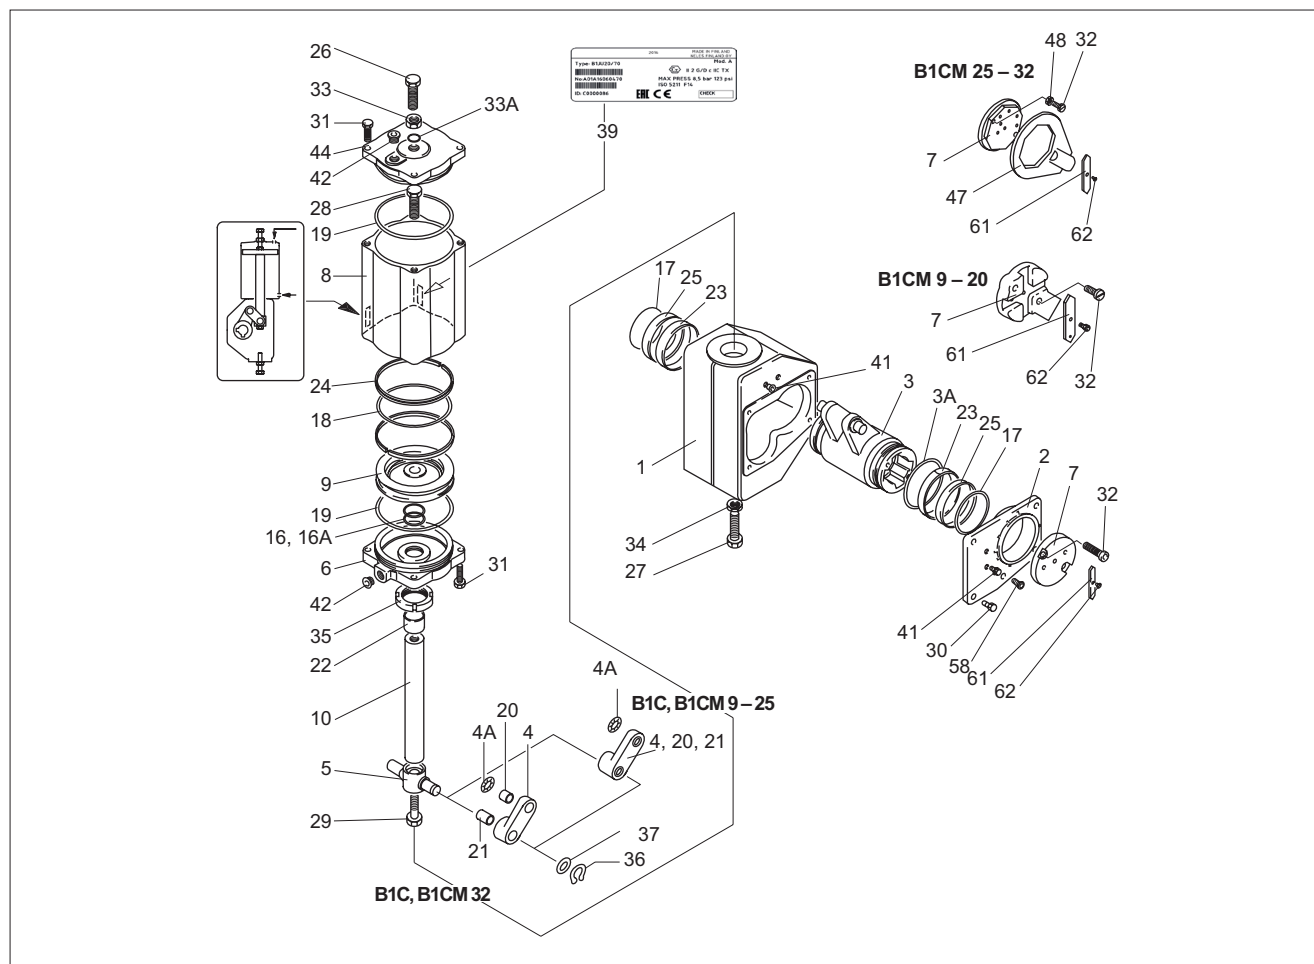

Item	Qty	Description	Materials
1	1	Housing	Cast iron
2	1	Cover	Cast iron
3	1	Lever arm	Ductile iron + nickel
3A	1	Antistatic ring	Brass
4	2	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	1	Bearing unit	Ductile iron + nickel
6	1	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	1	Cylinder	Aluminum alloy, anodized
9	1	Piston	Cast iron
10	1	Piston rod	Steel, hard chrome plated
16	1	O-ring	Nitrile rubber
16 A	1	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	1	O-ring	Nitrile rubber
19	2	O-ring	Nitrile rubber
20	2	Bearing	Steel+PTFE, Bronze+PTFE
21	2	Bearing	Steel+PTFE, Bronze+PTFE
22	1, 2	Bearing	PE-HD
23	2	Bearing	PE-HD
24	2,3	Piston seal	PE-HD
25	2	Bushing	Stainless steel

Item	Qty	Description	Materials
26	1	Stop screw	Stainless steel
27	1	Stop screw	Stainless steel
28	1	Screw	Steel, zincd
29	1	Screw	Steel, zincd
30	4	Screw	Stainless steel
31	8,12	Screw	Stainless steel
32	2	Screw	Stainless steel
33	1	Nut	Stainless steel
33A	1	O-ring	Nitrile rubber
34	1	Nut	Stainless steel
35	1	Lock nut	Steel
36	2	Lock ring	Steel
37	2	Support ring	Steel
39	1	ID plate	Polyester
41		Plug	Stainless steel
42		Plug	Plastic
44	1	Cylinder end	Ductile iron
47	1	Torsion arm	Steel
48	2	Washer	Steel
58	1	Pressure outlet valve	EPDM rubber
61	1	Direction arrow	Aluminum alloy
62	1	Screw	Stainless steel


Actuators B1C 40-75

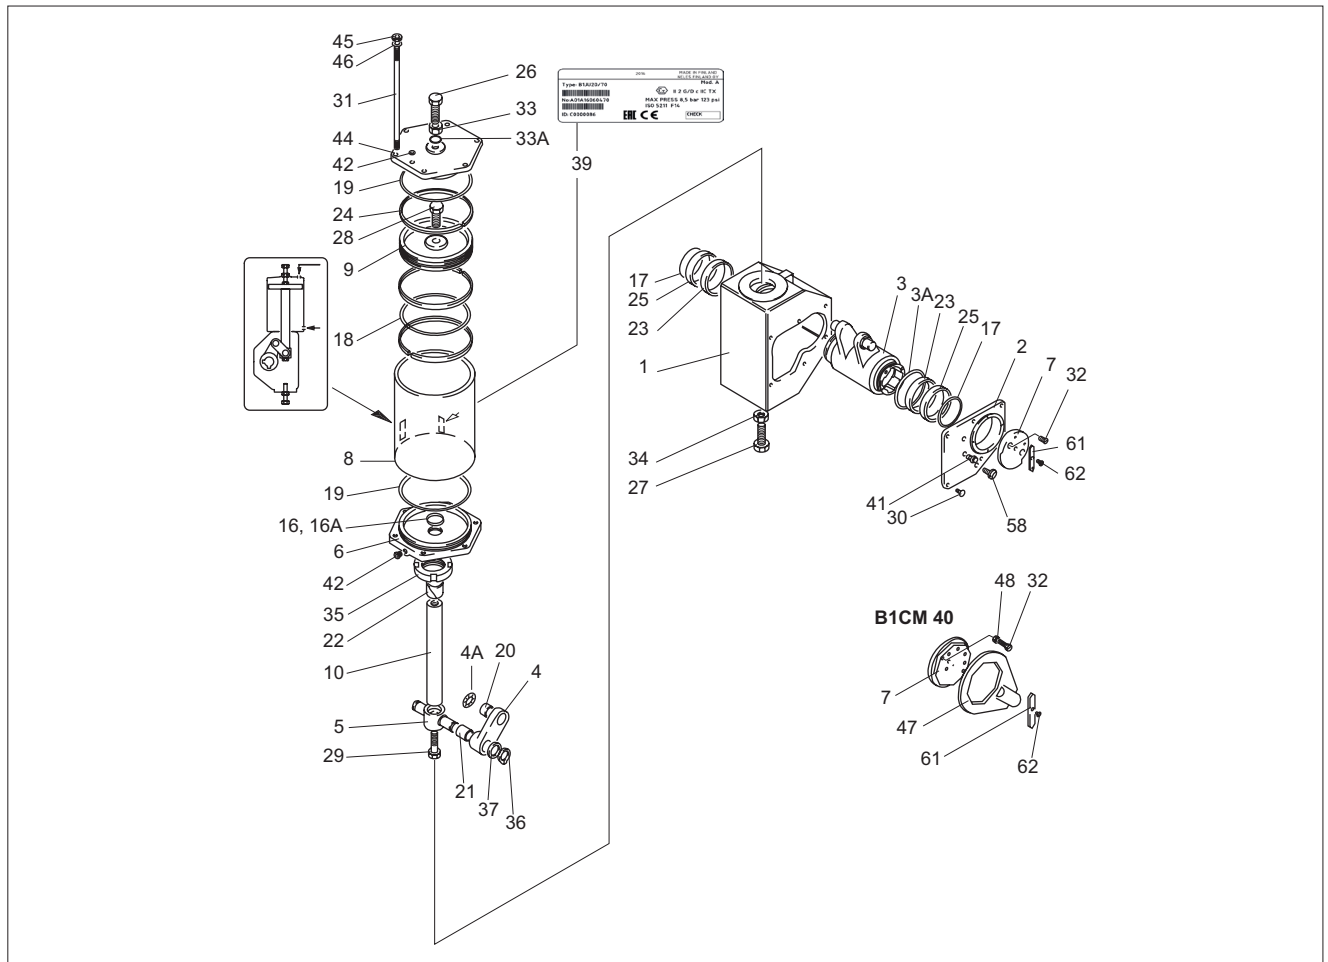

Item	Qty	Description	Materials
1	1	Housing	Steel
2	1	Cover	Steel
3	1	Lever arm	Ductile iron + nickel
3A	1	Antistatic ring	Brass
4	2	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	1	Bearing unit	Ductile iron + nickel
6	1	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	1	Cylinder	Aluminum alloy, anodized
9	1	Piston	Cast iron
10	1	Piston rod	Steel, hard chrome plated
16	1	O-ring	Nitrile rubber
16A	1	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	1	O-ring	Nitrile rubber
19	2	O-ring	Nitrile rubber
20	2	Bearing	Bronze net+PTFE
21	2	Bearing	Bronze net+PTFE
22	2	Bearing	PE-HD
23	2	Bearing	PE-HD
24	3, 4	Piston seal	PE-HD
25	2	Bushing	Stainless steel
26	1	Stop screw	Stainless steel

Item	Qty	Description	Materials
27	1	Stop screw	Stainless steel
28	1	Screw	Steel, zincd
29	1	Screw	Steel, zincd
30	6	Screw	Stainless steel
31	6	Stud	Steel, zincd
32	2	Screw	Stainless steel
33	1	Nut	Stainless steel
33A	1	O-ring	Nitrile rubber
34	1	Nut	Stainless steel
35	1	Lock nut	Steel
36	2	Lock ring	Steel
37	2	Support ring	Steel
39	1	ID plate	Polyester
41		Plug	Stainless steel
42		Plug	Plastic
44	1	Cylinder end	Ductile iron
45	6	Nut	Steel, zincd
46	6	Washer	Steel, zincd
47	1	Torsion arm	Steel
48	2	Washer	Steel
58	1	Pressure outlet valve	EPDM Rubber
61	1	Direction arrow	Aluminum alloy
62	1	Screw	Stainless steel

Actuators B1C 502-752

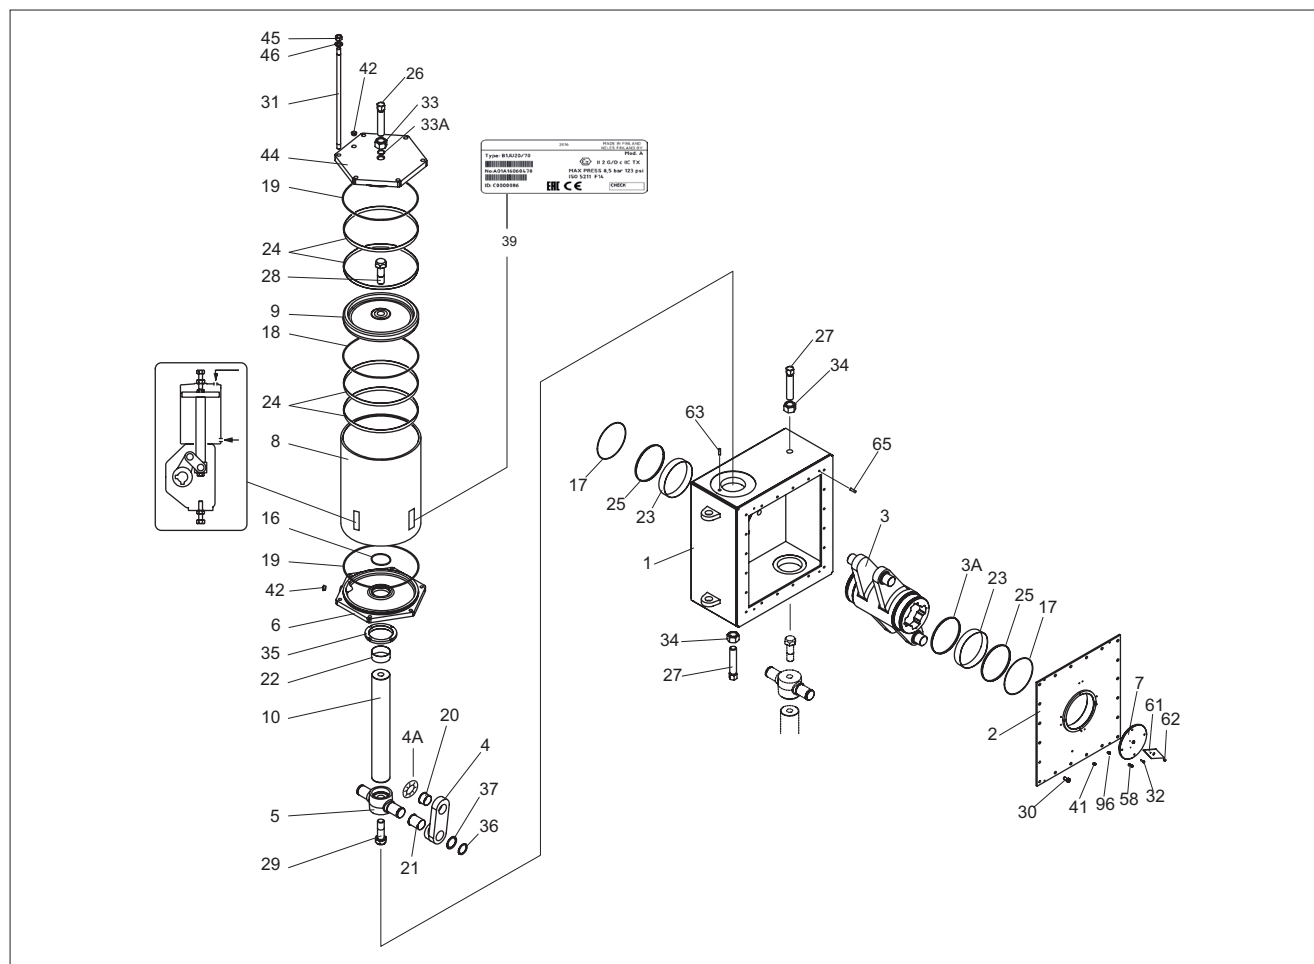

Item	Qty	Description	Materials
1	1	Housing	Steel
2	1	Cover	Steel
3	1	Lever arm	Ductile iron + nickel
3A	1	Antistatic ring	Brass
4	4	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	2	Bearing unit	Ductile iron + nickel
6	2	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	2	Cylinder	Aluminum alloy, anodized
9	2	Piston	Cast iron
10	2	Piston rod	Steel, hard chrome plated
16	2	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	2	O-ring	Nitrile rubber
19	4	O-ring	Nitrile rubber
20	4	Bearing	Bronze net+PTFE
21	4	Bearing	Bronze net+PTFE
22	4	Bearing	PE-HD
23	2	Bearing	PE-HD
24	8	Piston seal	PE-HD
25	2	Bushing	Stainless steel
26	2	Stop screw	Stainless steel

Item	Qty	Description	Materials
27	2	Stop screw	Stainless steel
28	2	Screw	Steel, zincd
29	2	Screw	Steel, zincd
30	20	Screw	Stainless steel
31	12	Stud	Steel, zincd
32	2	Screw	Stainless steel
33	2	Nut	Stainless steel
33A	2	O-ring	Nitrile rubber
34	2	Nut	Stainless steel
35	2	Lock nut	Steel
36	4	Lock ring	Steel
37	4	Support ring	Steel
39	1	ID plate	Polyester
41	4	Plug	Stainless steel
42	4	Plug	Plastic
44	2	Cylinder end	Ductile iron
45	12	Nut	Steel, zincd
46	12	Washer	Steel, zincd
58	1	Pressure outlet valve	EPDM rubber
61	1	Direction arrow	Aluminum alloy
62	2	Screw	Stainless steel
63	2	Pin	Steel
65	4	Pin	Steel

Double acting actuator, series B1C

Operation

The linkage mechanism within the B-series actuator converts linear motion of the piston into a 90° (max. 98°) rotation of the actuator shaft.

Max. torque is achieved at $\beta = 0^\circ$ which usually corresponds to the closed position of ball and butterfly valves and where max. seat torque normally appears.

Another peak is achieved at 60-80° which corresponds to the dynamic torque peak of butterfly valves.

Selection


To select the proper actuator for a particular valve and service, use Nelprof™, which is the official sizing tool provided by Valmet Flow Control.

Located at: <https://nelprof.valmet.com/>


Select the actuator that will, at the available air supply pressure, provide a torque output no less than the required operating torque for the valve. If in doubt, select the next larger actuator.

The B1C series torque range over different models is starting from smallest single cylinder models from 40 Nm to up to 100 000 Nm with largest double cylinder versions.


Below table lists min. nominal torque (M_n 1.0 @ $\beta = 25^\circ$) values of B1C-series.

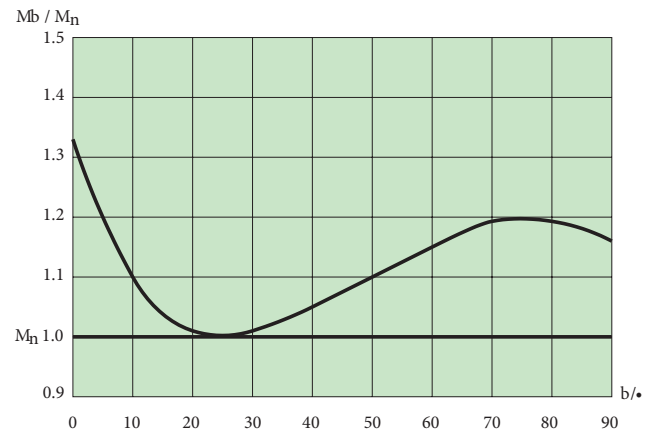

Output torque as a function of turning angle.

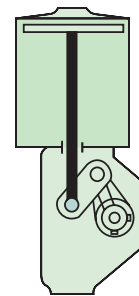

$\beta = 0^\circ$
(valve is closed)

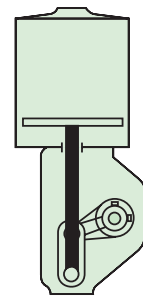

$\beta = 90^\circ$
(valve is open)

Actuator torque M_n

Actuator type	Torque Output M_n Nm - ft-lbs at Specific Supply Pressure bar - psi													
	3.0 bar	43 psi	3.5 bar	50 psi	4 bar	58 psi	5 bar	72 psi	5.5 bar	80 psi	6 bar	87 psi	7 bar	102 psi
	Nm	lbf ft	Nm	lbf ft	Nm	lbf ft	Nm	lbf ft	Nm	lbf ft	Nm	lbf ft	Nm	lbf ft
B1C 6	45	30	51	38	60	45	75	55	82	60	90	65	100	75
B1C 9	85	60	100	75	115	90	145	110	160	120	175	130	205	150
B1C11	160	120	185	137	220	160	270	200	300	220	330	240	375	280
B1C13	330	245	390	290	460	335	565	415	620	460	675	505	790	585
B1C17	620	460	720	530	850	625	1040	780	1160	850	1260	930	1570	1085
B1C20	750	560	880	650	1030	760	1290	940	1400	1040	1550	1140	1780	1320
B1C25	1450	1070	1700	1250	2010	1460	2500	1830	2700	2000	3000	2230	3450	2540
B1C32	2890	2140	3400	2500	4000	2930	5000	3650	5500	4100	6000	4450	7000	5170
B1C40	6100	4490	7100	5200	8290	6150	10310	7600	11300	8400	12290	9100	14300	10550
B1C50	11770	8770	13900	10200	16290	12000	20210	14900	22000	16300	24190	17810	28100	20700
B1C60	17330	11980	20300	15000	23710	17460	29580	21770	32400	23900	35320	26030	41190	30440
B1C75	27180	20010	31700	23400	37170	27420	46250	34060						
B1C502	26540	19580	31000	22900	36290	26830	44790	33330	49600	36600	54500	39870	63000	46460
B1C602	38200	28140	44600	32900	52200	38540	65110	48020	71400	52700	77710	57290	90490	66750
B1C752	60240	44410	70300	51900	82340	60680	102710	75630						

6B20EN - 3/2026


8

6B20EN - 3/2026

6B20EN - 3/2026




Actuators B1J 25-40

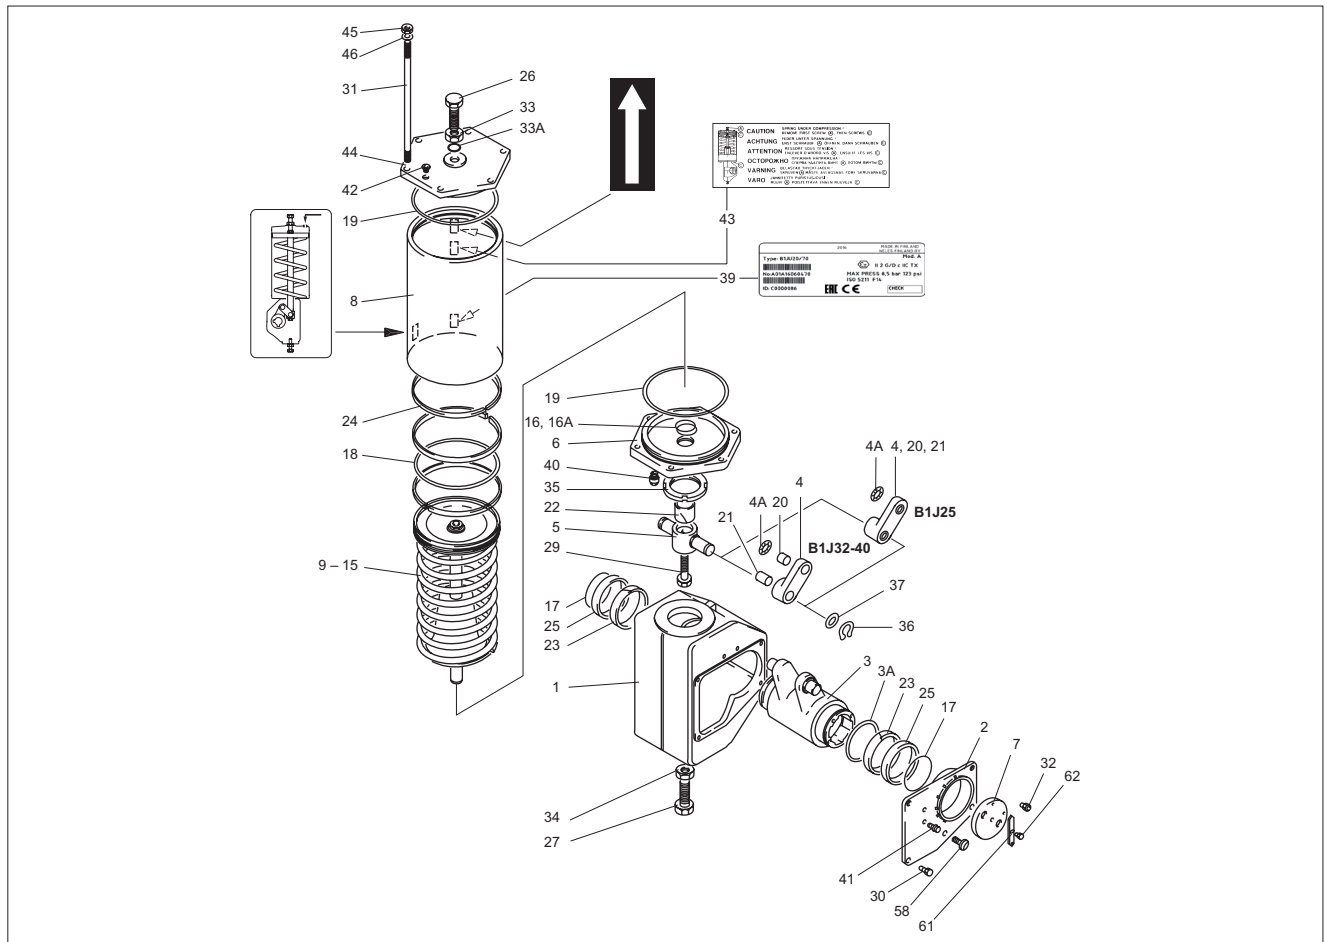

Item	Qty	Description	Materials
1	1	Housing	Cast iron/Steel (BJ40)
2	1	Cover	Cast iron
3	1	Lever arm	Ductile iron + nickel
3A	1	Antistatic ring	Brass
4	2	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	1	Bearing unit	Ductile iron + nickel
6	1	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	1	Cylinder	Aluminum alloy, anodized
9	1	Piston	Cast iron
10	1	Piston rod	Steel, hard chrome plated
11	1	Spring	Steel
12	1	Spring plate	Steel, zincd
13	1	Clamping tube	Steel
14	2	Lock ring	Steel
15	1	Hexagon nut	Steel
16	1	O-ring	Nitrile rubber
16A	1	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	1	O-ring	Nitrile rubber
19	1	O-ring	Nitrile rubber
20	2	Bearing	Steel+PTFE, Bronze+PTFE
21	2	Bearing	Steel+PTFE, Bronze+PTFE
22	1, 2	Bearing	PE-HD
23	2	Bearing	PE-HD

Item	Qty	Description	Materials
24	3, 4	Piston seal	PE-HD
25	2	Bushing	Stainless steel
26	1	Stop screw	Stainless steel
27	1	Stop screw	Stainless steel
29	1	Screw	Steel, zincd
30	4	Screw	Stainless steel
31	6	Stud	Steel, zincd
32	2	Screw	Stainless steel
33	1	Nut	Stainless steel
33A	1	O-ring	Nitrile rubber
34	1	Nut	Stainless steel
35	1	Lock nut	Steel
36	2	Lock ring	Steel
37	2	Support ring	Steel
39	1	ID plate	Polyester
40	1	Filter	Stainless steel
41	4	Plug	Stainless steel
42	1	Plug	Plastic
43	1	Warning plate	Aluminum sticker
44	2	Cylinder end	Ductile iron
45	6	Nut	Steel, zincd
46	6	Washer	Steel, zincd
58	1	Pressure outlet valve	EPDM rubber
61	1	Direction arrow	Aluminum plate
62	1	Screw	Stainless steel


Actuator B1J 322

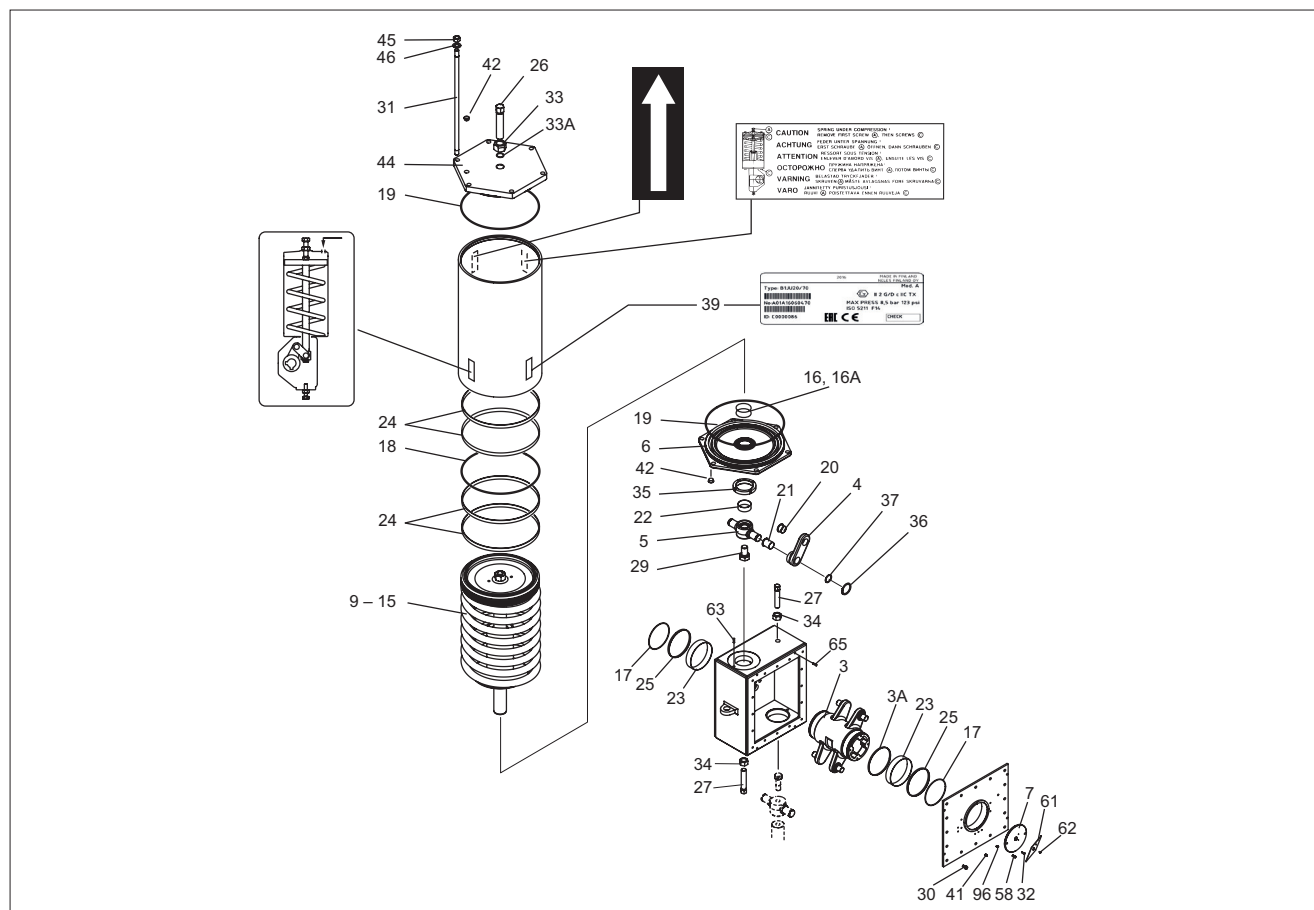

Item	Qty	Description	Materials
1	1	Housing	Steel
2	1	Cover	Steel
3	1	Lever arm	Ductile iron + nickel
3A	1	Antistatic ring	Brass
4	4	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	2	Bearing unit	Ductile iron + nickel
6	2	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	2	Cylinder	Aluminum alloy, anodized
9	2	Piston	Cast iron
10	2	Piston rod	Steel, hard chrome plated
11	2	Spring	Steel
12	2	Spring plate	Steel
13	2	Clamping tube	Steel
14	4	Lock ring	Steel
15	2	Hexagon nut	Steel
16	2	O-ring	Nitrile rubber
16 A	2	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	2	O-ring	Nitrile rubber
19	4	O-ring	Nitrile rubber
20	4	Bearing	Bronze net+PTFE
21	4	Bearing	Bronze net+PTFE
22	2	Bearing	PE-HD
23	2	Bearing	PE-HD
24	8	Piston seal	PE-HD

Item	Qty	Description	Materials
25	2	Bushing	Stainless steel
26	2	Stop screw	Stainless steel
27	2	Stop screw	Stainless steel
29	2	Screw	Steel, zincd
30	16	Screw	Stainless steel
31	12	Stud	Steel, zincd
32	2	Screw	Stainless steel
33	2	Nut	Stainless steel
33A	2	O-ring	Nitrile rubber
34	2	Nut	Stainless steel
35	2	Lock nut	Steel
36	4	Lock ring	Steel
37	4	Support ring	Steel
39	1	ID plate	Polyester
40	2	Filter	Stainless steel
41	4	Plug	Stainless steel
42	2	Plug	Plastic
43	2	Warning plate	Aluminum sticker
44	2	Cylinder end	Ductile iron
45	12	Hexagon nut	Steel, zincd
46	12	Washer	Steel, zincd
58	1	Pressure outlet valve	EPDM rubber
61	1	Direction arrow	Aluminum alloy
62	2	Screw	Stainless steel
63	2	Pin	Steel
65	4	Pin	Steel


Actuators B1JA 6-20

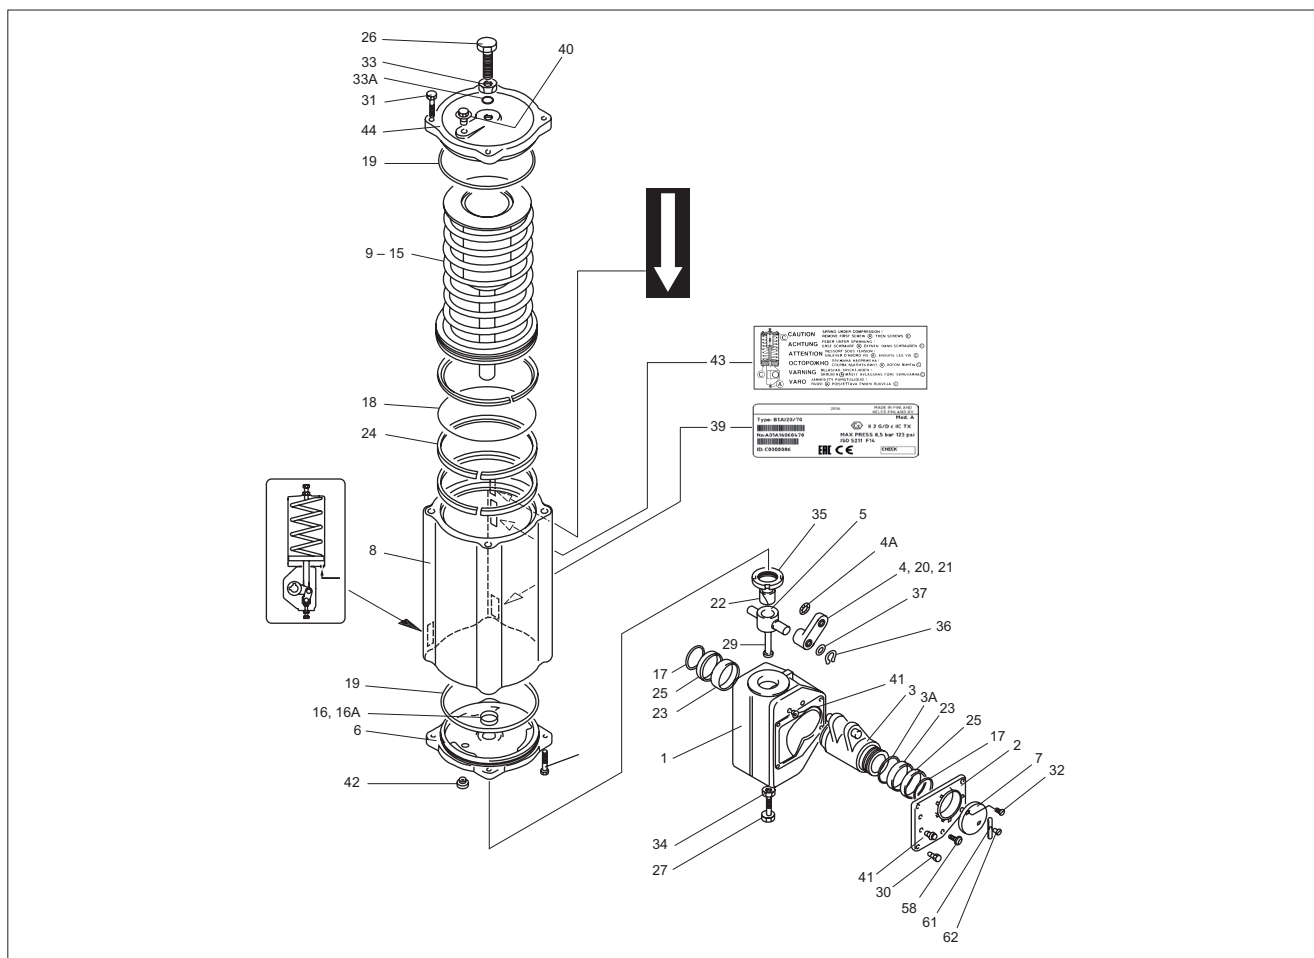

Item	Qty	Description	Materials
1	1	Housing	Cast iron
2	1	Cover	Cast iron
3	1	Lever arm	Ductile iron + nickel
3A	1	Antistatic ring	Brass
4	2	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	1	Bearing unit	Ductile iron + nickel
6	1	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	1	Cylinder	Aluminum alloy, anodized
9	1	Piston	Cast iron
10	1	Piston rod	Steel, hard chrome plated
11	1	Spring	Steel
12	1	Spring plate	Steel, zincd
13	1	Clamping tube	Steel
14	2	Lock ring	Steel
15	1	Hexagon nut	Steel
16	1	O-ring	Nitrile rubber
16A	1	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	1	O-ring	Nitrile rubber
19	1	O-ring	Nitrile rubber
20	2	Bearing	DU-type, steel+PTFE
21	2	Bearing	DU-type, steel+PTFE

Item	Qty	Description	Materials
22	1	Bearing	PE-HD
23	2	Bearing	PE-HD
24	3	Piston seal	PE-HD
25	2	Bushing	Stainless steel
29	1	Screw	Steel, zincd
30	4	Screw	Stainless steel
31	8, 12	Screw	Stainless steel
32	2	Screw	Stainless steel
33	1	Nut	Stainless steel
33A	1	O-ring	Nitrile rubber
34	1	Nut	Stainless steel
35	1	Lock nut	Steel
36	2	Lock ring	Steel
37	2	Support ring	Steel
39	1	ID plate	Polyester
41	4	Plug	Stainless steel
42	1	Plug	Plastic
43	1	Warning plate	Plastic
44	1	Cylinder end	Ductile iron
58	1	Pressure outlet valve	EPDM rubber
61	1	Direction arrow	Aluminum alloy
62	1	Screw	Stainless steel


Actuator B1JA 25-40

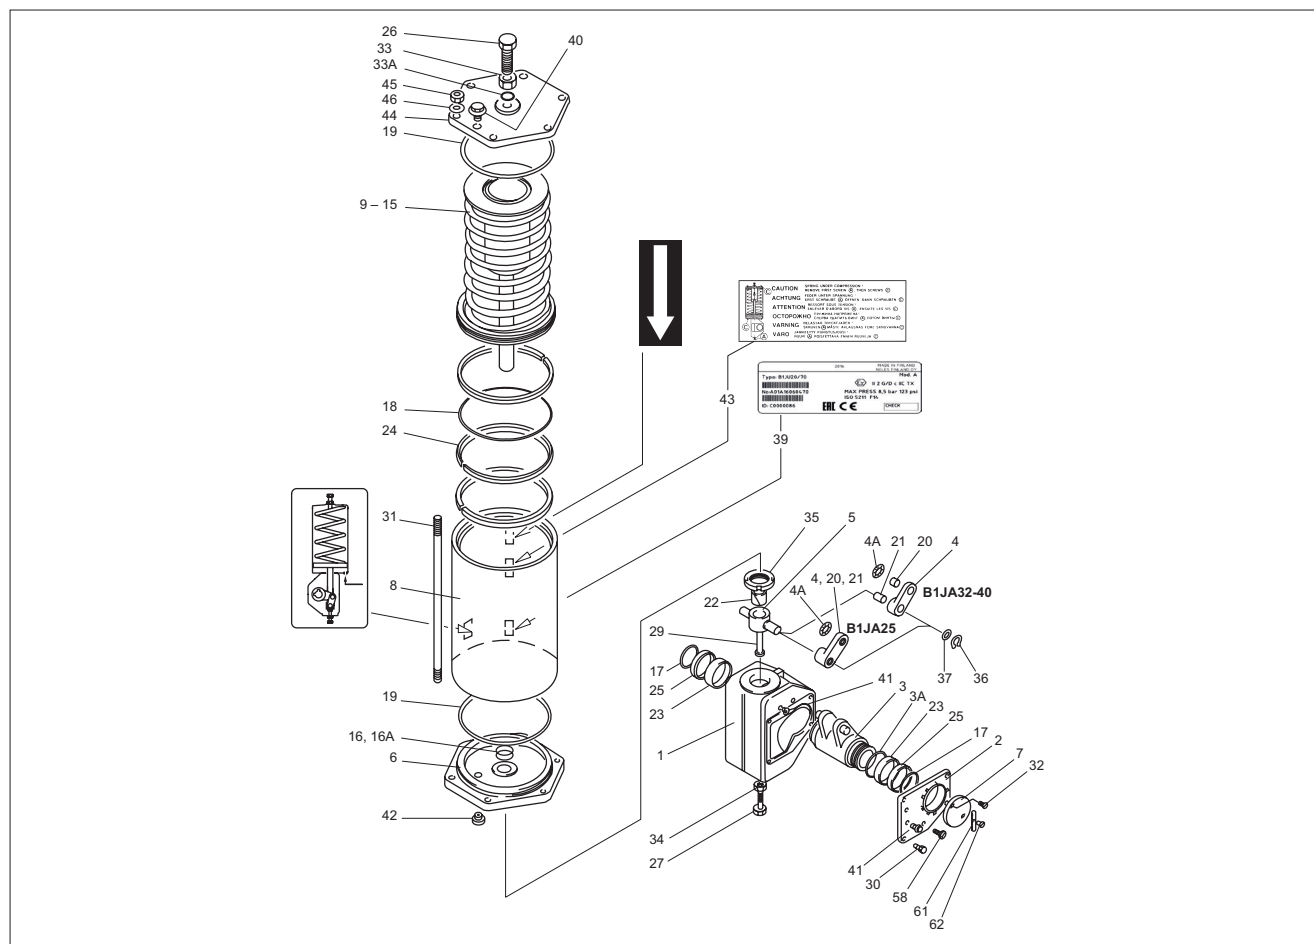

Item	Qty	Description	Materials
1	1	Housing	Cast iron
2	1	Cover	Cast iron
3	1	Lever arm	Ductile iron + nickel
3A	1	Antistatic ring	Brass
4	2	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	1	Bearing unit	Ductile iron + nickel
6	1	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	1	Cylinder	Aluminum alloy, anodized
9	1	Piston	Cast iron
10	1	Piston rod	Steel, hard chrome plated
11	1	Spring	Steel
12	1	Spring plate	Steel
13	1	Clamping tube	Steel
14	2	Lock ring	Steel
15	1	Hexagon nut	Steel
16	1	O-ring	Nitrile rubber
16A	1	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	1	O-ring	Nitrile rubber
19	1	O-ring	Nitrile rubber
20	2	Bearing	Steel+PTFE, Bronze net+PTFE
21	2	Bearing	Steel+PTFE, Bronze net+PTFE
22	1, 2	Bearing	PE-HD
23	2	Bearing	PE-HD

Item	Qty	Description	Materials
24	3, 4	Piston seal	PE-HD
25	2	Bushing	Stainless steel
26	1	Stop screw	Stainless steel
27	1	Stop screw	Stainless steel
29	1	Screw	Steel, zincd
30	4	Screw	Stainless steel
31	6	Stud	Steel, zincd
32	2	Screw	Stainless steel
33	1	Nut	Stainless steel
33A	1	O-ring	Nitrile rubber
34	1	Nut	Stainless steel
35	1	Lock nut	Steel
36	2	Lock ring	Steel
37	2	Support ring	Steel
39	1	ID plate	Polyester
40	1	Filter	Stainless steel
41	4	Plug	Stainless steel
42	1	Plug	Plastic
43	1	Warning plate	Plastic
44	1	Cylinder end	Ductile iron
45	6	Nut	Steel, zincd
46	6	Washer	Steel, zincd
58	1	Pressure outlet valve	EPDM rubber
61	1	Direction arrow	Aluminum plate
62	1	Screw	Stainless steel

Actuator B1JA 322

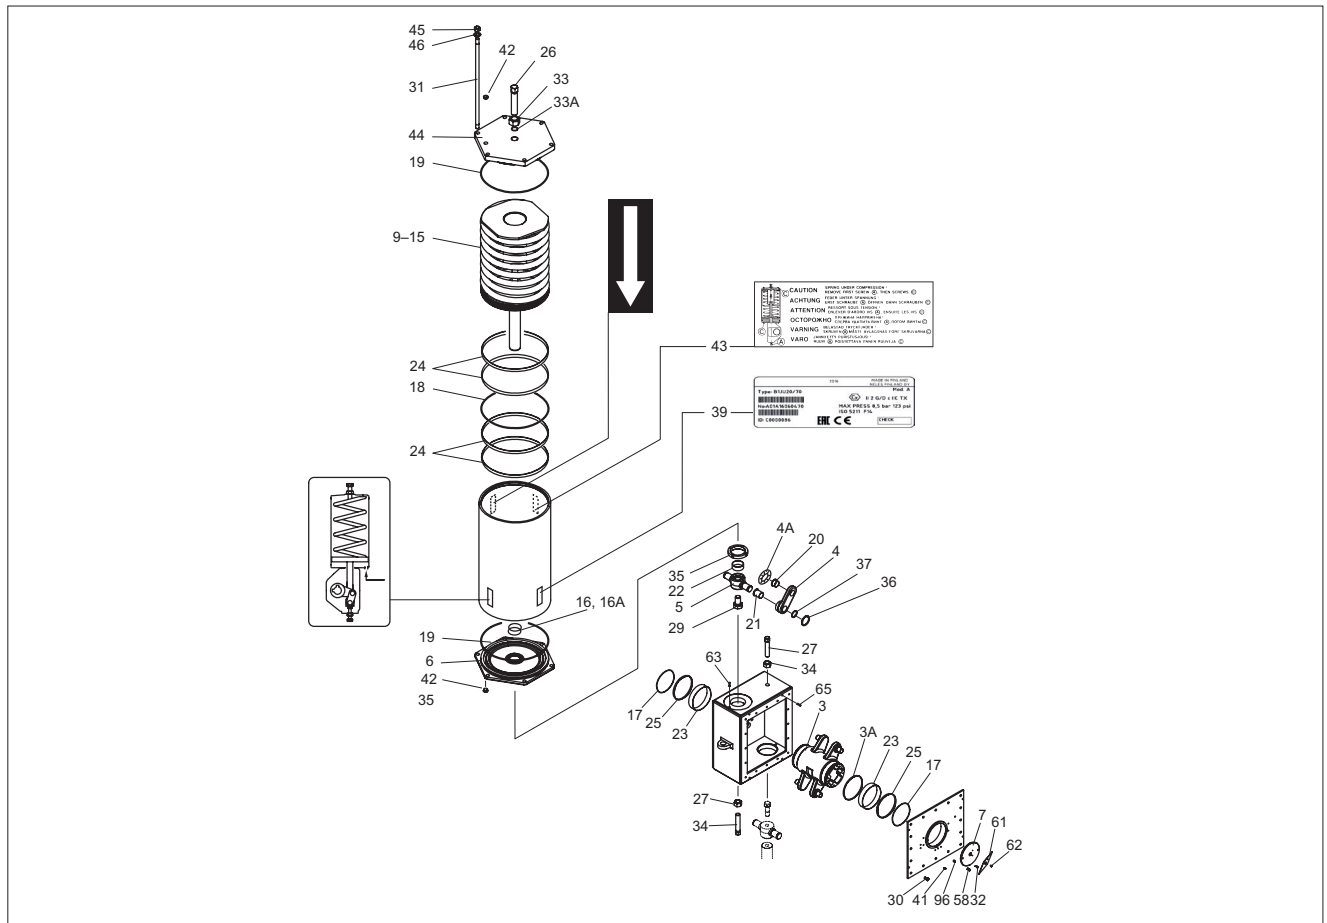

Item	Qty	Description	Materials
1	1	Housing	Steel
2	1	Cover	Steel
3	1	Lever arm	Ductile iron+nickel
3A	1	Antistatic ring	Brass
4	4	Connection arm	Ductile iron
4A	1	Antistatic ring	Stainless steel
5	2	Bearing unit	Ductile iron+nickel
6	2	Cylinder base	Ductile iron
7	1	Pointer cover	Aluminum alloy
8	1	Cylinder	Aluminum alloy, anodized
9	2	Piston	Cast iron
10	2	Piston rod	Steel, hard chrome plated
11	2	Spring	Steel
12	2	Spring plate	Steel
13	2	Clamping tube	Steel
14	4	Lock ring	Steel
15	2	Hexagon nut	Steel
16	2	O-ring	Nitrile rubber
16A	2	O-ring	Nitrile rubber
17	2	X-ring	Nitrile rubber
18	2	O-ring	Nitrile rubber
19	4	O-ring	Nitrile rubber
20	4	Bearing	Bronze net+PTFE
21	4	Bearing	Bronze net+PTFE
22	2	Bearing	PE-HD
23	2	Bearing	PE-HD
24	8	Piston seal	PE-HD

Item	Qty	Description	Materials
25	2	Bushing	Stainless steel
26	2	Stop screw	Stainless steel
27	2	Stop screw	Stainless steel
29	2	Screw	Steel, zincd
30	16	Screw	Stainless steel
31	12	Stud	Steel, zincd
32	2	Screw	Stainless steel
33	2	Nut	Stainless steel
33A	2	O-ring	Nitrile rubber
34	2	Nut	Stainless steel
35	2	Lock nut	Steel
36	4	Lock ring	Steel
37	4	Support ring	Steel
39	1	ID plate	Polyester
40	2	Filter	Stainless steel
41	4	Plug	Stainless steel
42	2	Plug	Plastic
43	2	Warning plate	Aluminum sticker
44	2	Cylinder end	Ductile iron
45	2	Hexagon nut	Steel, zincd
46	2	Washer	Steel, zincd
58	1	Pressure outlet valve	EPDM rubber
61	1	Direction arrow	Aluminum plate
62	2	Screw	Stainless steel
63	2	Pin	Steel
65	4	Pin	Steel

Single acting actuator series B1J

Operation

The linkage converts linear motion of the piston into a 90° (max. 98°) rotation of the actuator shaft. As a result of the linkage design, the relationship between output torque and piston force depends on the angle of the actuator shaft.

Actuator selection

To select the proper actuator for a particular valve and service, use Nelprof™, which is the official sizing tool provided by Valmet Flow Control.

Located at: <https://nelprof.valmet.com/>

Select the actuator that will, at the available air supply pressure, provide a torque output no less than the required operating torque for the valve. If in doubt, select the next larger actuator.

Actuator torque

Note: Maximum allowed supply pressure is 120 psi (8.5 bar). Spring torque outputs for B1J are starting with the smallest actuator size from 25 Nm up to 12 000 Nm with the largest size.

B1J series is available with 3 different spring options:

B1JK_ has a lighter spring for lower supply pressures.

B1J_ for medium supply pressures, suitable for most cases.


B1JV_ has a stronger spring for higher supply pressures.

Light and strong spring can be selected in certain specific cases to make more economical choice in actuator sizing with Nelprof.

Spring type can be changed afterwards to actuator, but please consult Valmet Flow Control for spring selection if in doubt.

General selection principles

The first selection principle for actuator sizing must always be the torque given by the spring. Secondly, it must be checked that the available pressure is sufficient to give at least the same torque as the spring, but in the opposite direction.

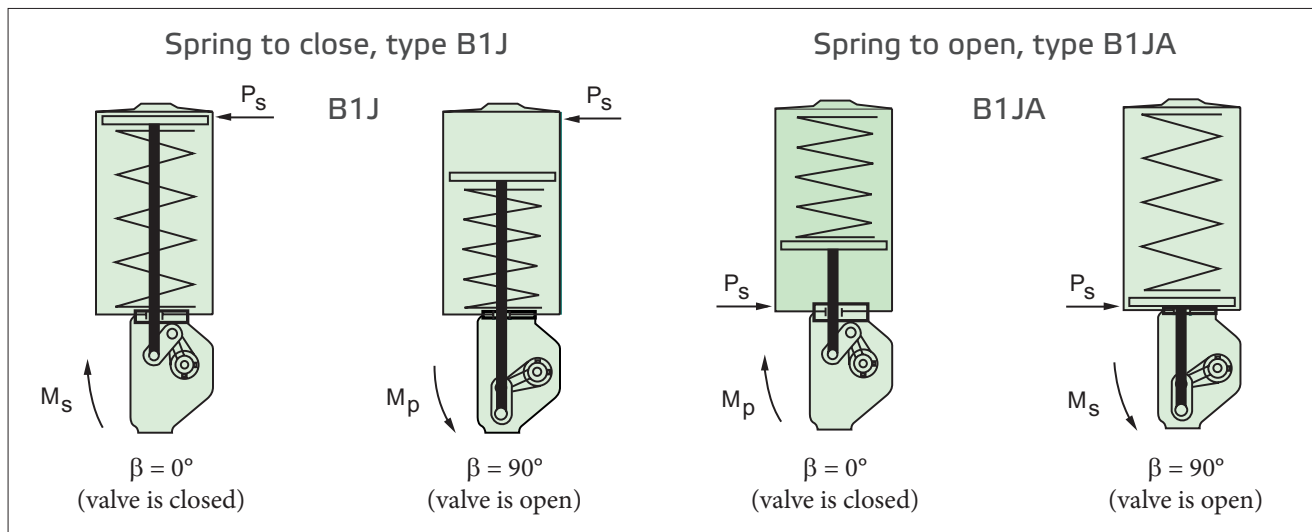


Actuator type	Spring min torque Mn	
	Nm	lbf ft
B1JK6 B1JKA6	28	21
B1J6 B1JA6	36	26
B1JV6 B1JVA6	48	35
B1JK8, B1JKA8	50	37
B1J8, B1JA8	70	50
B1JV8, B1JVA8	90	66
B1JK10, B1JKA10	105	77
B1J10, B1JA10	150	110
B1JV10, B1JVA10	200	150
B1JK12, B1JKA12	210	155
B1J12, B1JA12	300	220
B1JV12, B1JVA12	390	290
B1JK16, B1JKA16	420	310
B1J16, B1JA16	600	440
B1JV16, B1JVA16	780	575

Actuator type	Spring min torque Mn	
	Nm	lbf ft
B1JK20, B1JKA20	850	630
B1J20, B1JA20	1200	880
B1JV20, B1JVA20	1500	1100
B1JK25, B1JKA25	1700	1250
B1J25, B1JA25	2400	1760
B1JV25, B1JVA25	3000	2200
B1JK32, B1JKA32	3400	2500
B1J32, B1JA32	4800	3500
B1JV32, B1JVA32	6100	4500
B1JK40 B1JKA40	5700	4207
B1J40, B1JA40	8400	6199
B1JV40, B1JVA40	10900	8044
B1JK322, B1JKA322	6800	5000
B1J322, B1JA322	9600	7000
B1JV322, B1JVA322	12200	9000


Special constructions

Locking device
On housing end

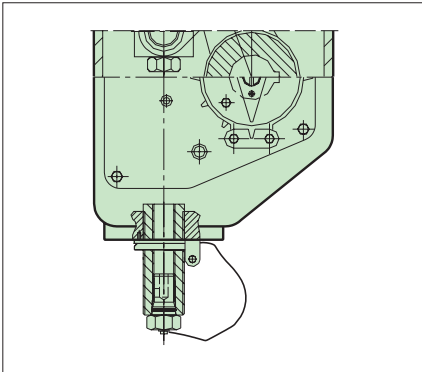


Type code: B1_Q

On cylinder end

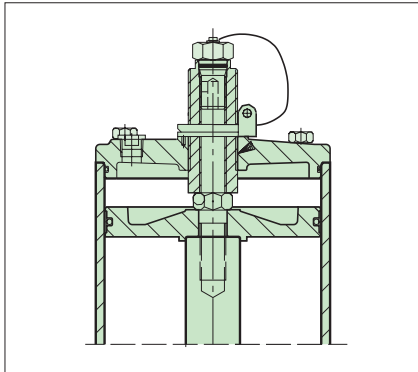


Type code: B1_W

Simple service lock

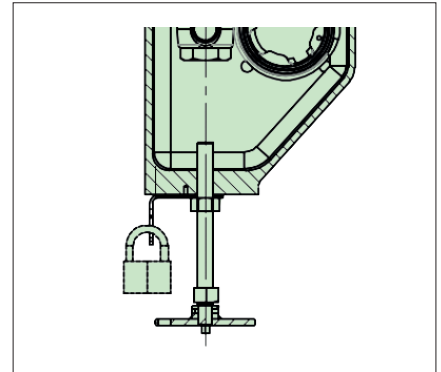


Type code: B1_D

Automatic latching device for
closed position

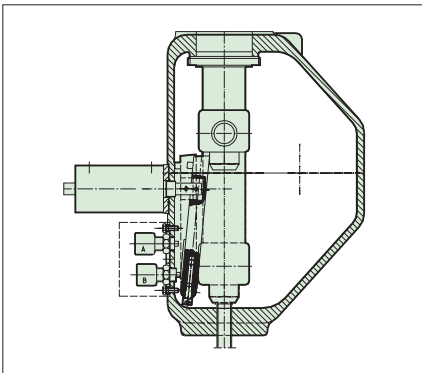


Type code: B1C_P

Manual latching
device

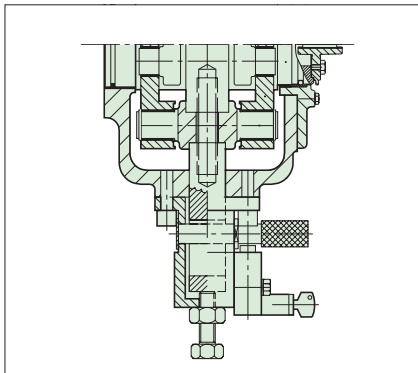


Type code: B1_T

Shock absorber on
housing end

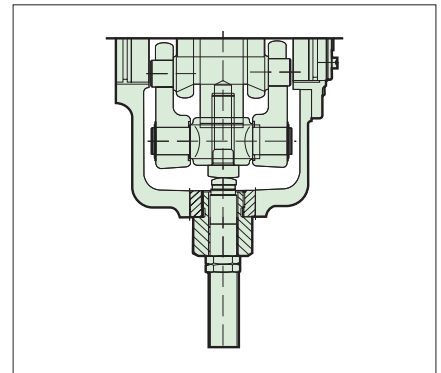


Type code: B1C_N

Handwheel
On cylinder end

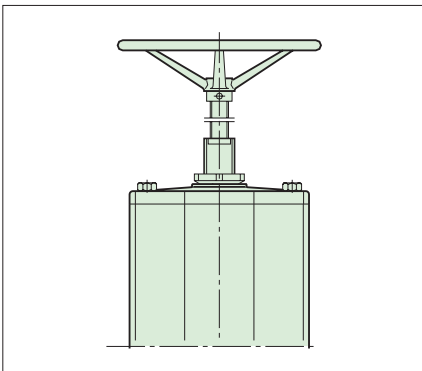


Type code: B1C_K

On housing end

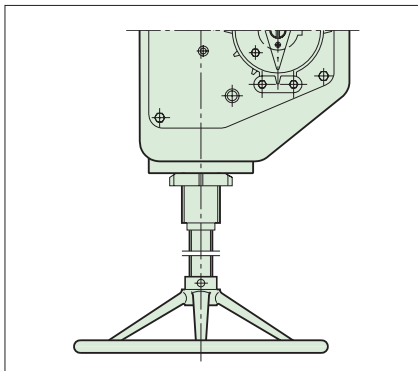

Type code: B1C_L

Hydraulic manual override

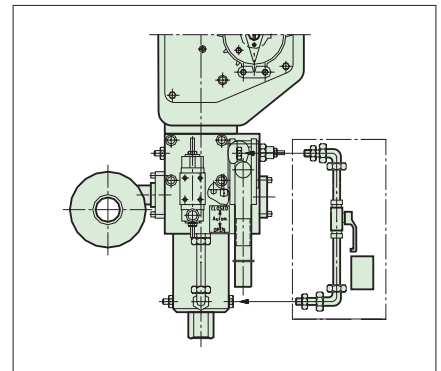


Type code: B1CH

Actuator accessories

The BMO-series is a declutchable manual override for B1-series actuators. It is a sandwich type manual operator mounted between the actuator and the valve. The BMO is normally disengaged from the actuator and the valve. In case of loss of air supply, the BMO can cycle the actuator as required, so the valve can be moved safely to desired position. It is easy to operate manually with human force due to high reduction rate of the gear. The BMO has same ISO 5211 mounting faces as the B1 actuator, but uses an additional keyway adapter and an extension shaft as linkage parts between the actuator and valve. The BMO can be ordered as a separate unit, so it does not affect B1 typecoding, and it can be used as alternative to other handwheel options for B1.


Always select the BMO so that the BMO torque capacity is higher than the valve required torque. Check BMO torque capacity from the table below. For double-acting B1C the BMO selection is straightforward based on the table, but for spring return B1J version, the BMO must also overcome the spring torque when operated in reverse direction. Please consult Valmet Flow Control for help with BMO typecoding, selection and sizing. The BMO is suitable only for B1-series. Not for old B-series due to mounting face changes.

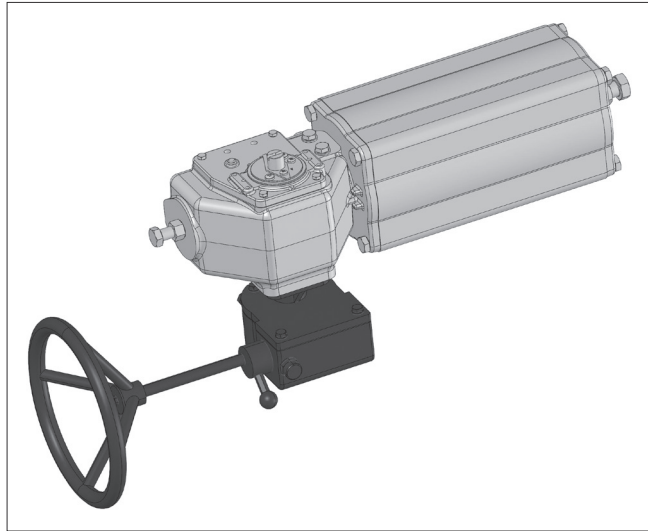

Actuator	Mounting face	De-clutchable gear	BMO capacity (Nm)	MAX valve stem (mm)
B1C6; B1J6	F05	BMO100	100	15
B1C6; B1J6	F07	BMO250	250	15
B1C6; B1J6	F07	BMO450	450	20
B1C9; B1J8	F07	BMO450	450	20
B1C11; B1J10	F10	BMO450	450	20
B1C6; B1J6	F07	BMO750	750	25
B1C9; B1J8	F07	BMO750	750	25
B1C11; B1J10	F10	BMO750	750	25
B1C13; B1J12	F12	BMO750	750	25
B1C11; B1J10	F10	BMO1000	1000	35
B1C13; B1J12	F12	BMO1000	1000	35
B1C17; B1J16	F14	BMO1000	1000	35
B1C20; B1J20	F14	BMO1000	1000	35
B1C11; B1J10	F10	BMO1500	1500	35
B1C13; B1J12	F12	BMO1500	1500	35
B1C17; B1J16	F14	BMO1500	1500	35
B1C20; B1J20	F14	BMO1500	1500	35
B1C13; B1J12	F12	BMO2500	2500	45
B1C17; B1J16	F14	BMO2500	2500	45
B1C20; B1J20	F14	BMO2500	2500	45
B1C25; B1J25	F16	BMO2500	2500	45
B1C25; B1J25	F16	BMO3500	3500	55
B1C32; B1J32	F25	BMO3500	3500	55
B1C25; B1J25	F16	BMO5000	5000	55
B1C32; B1J32	F25	BMO5000	5000	55
B1C25; B1J25	F16	BMO7500	7500	70
B1C32; B1J32	F25	BMO7500	7500	70
B1C32; B1J32	F25	BMO10000	10000	85
B1C40; B1J40	F30	BMO10000	10000	85
B1C32; B1J32	F25	BMO15000	15000	95
B1C40; B1J40	F30	BMO15000	15000	95
B1C40; B1J40	F30	BMO35000	35000	95
B1C50; 60; 75	F35	BMO35000	35000	95

Dimensional drawings

B1C

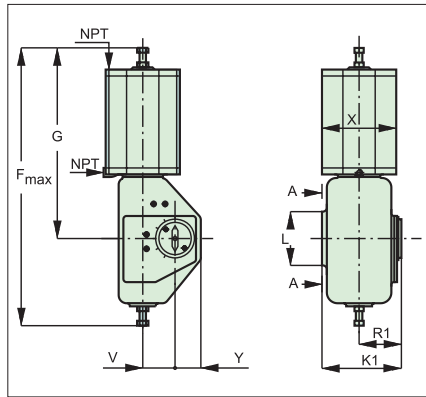


B1C

Type	Dimensions, mm								NPT	kg
	X	G	F	V	Y	L	K1	R1		
B1C6	90	270	395	36	46	70	138	80	1/4	4,2
B1C9	110	315	450	43	50	80	140	81	1/4	9,6
B1C11	135	375	535	51	50	95	154	89	3/8	16
B1C13	175	445	640	65	65	117	190	109	3/8	31
B1C17	215	555	785	78	70	137	222	126	1/2	54
B1C20	215	590	880	97	80	142	262	147	1/2	73
B1C25	265	725	1075	121	110	176	304	166	1/2	131
B1C32	395	920	1370	153	146	280	379	204	3/4	256
B1C40	505	1150	1670	194	185	335	449	224	3/4	446
B1C50	610	1390	2060	242	195	410	543	268	1	830
B1C60	725	1390	2060	242	195	410	543	268	1	1080
B1C75	875	1390	2060	242	195	410	543	268	1	1190

Type	Dimensions, inch								NPT	lbs
	X	G	F	V	Y	L	K1	R1		
B1C6	3.54	10.60	15.60	1.42	1.81	2.76	5.43	3.15	1/4	9
B1C9	4.33	12.40	17.70	1.69	1.97	3.15	5.51	3.19	1/4	21
B1C11	5.31	14.80	21.10	2.01	1.97	3.74	6.06	3.50	3/8	35
B1C13	6.89	17.50	25.20	2.56	2.56	4.60	7.48	4.29	3/8	68
B1C17	8.46	21.90	30.90	3.07	2.76	5.39	8.74	4.96	1/2	119
B1C20	8.46	23.20	34.70	3.82	3.15	5.59	10.31	5.79	1/2	161
B1C25	10.43	28.50	42.30	4.76	4.33	6.93	11.97	6.54	1/2	289
B1C32	15.55	36.20	53.90	6.02	5.75	11.0	14.92	8.03	3/4	564
B1C40	19.88	45.30	65.70	7.64	7.28	13.19	17.68	8.82	3/4	983
B1C50	24.02	54.70	81.10	9.53	7.68	16.14	21.38	10.55	1	1829
B1C60	28.54	54.70	81.10	9.53	7.68	16.14	21.38	10.55	1	2380
B1C75	34.45	54.70	81.10	9.53	7.68	16.14	21.38	10.55	1	2620

B1J, B1JA

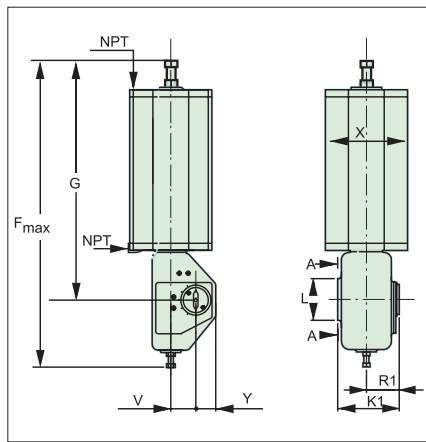


B1J, B1JA

Type	Dimensions, mm								NPT	kg
	X	G	F	V	Y	L	K1	R1		
B1J, B1JA6	110	368	485	36	47	70	138	80	3/8	13
B1J, B1JA8	135	420	555	43	50	80	140	81	3/8	17
B1J, B1JA10	175	480	640	51	50	95	154	89	3/8	30
B1J, B1JA12	215	620	815	65	65	117	190	109	1/2	57
B1J, B1JA16	265	760	990	78	70	137	222	126	1/2	100
B1J, B1JA20	395	940	1230	97	80	142	262	147	3/4	175
B1J, B1JA25	505	1140	1490	121	110	176	304	166	3/4	350
B1J, B1JA32	540	1435	1885	153	146	280	379	204	1	671
B1J, B1JA40	724	1578	2095	194	185	335	445	220	1	1100

Type	Dimensions, inch								NPT	lbs
	X	G	F	V	Y	L	K1	R1		
B1J, B1JA6	4.33	14.49	19.09	1.42	1.85	2.76	5.43	3.15	3/8	28.5
B1J, B1JA8	5.31	16.50	21.90	1.69	1.97	3.15	5.51	3.19	3/8	37
B1J, B1JA10	6.89	18.90	25.20	2.01	1.97	3.74	6.06	3.50	3/8	66
B1J, B1JA12	8.46	24.40	32.10	2.56	2.56	4.60	7.48	4.29	1/2	126
B1J, B1JA16	10.43	29.90	38.00	3.07	2.76	5.39	8.74	4.96	1/2	220
B1J, B1JA20	15.55	37.00	48.40	3.82	3.15	5.59	10.31	5.79	3/4	386
B1J, B1JA25	19.88	44.90	58.70	4.76	4.33	6.93	11.97	6.54	3/4	771
B1J, B1JA32	21.26	56.50	74.20	6.02	5.75	11.0	14.92	8.03	1	1479
B1J, B1JA40	28.5	62.13	82.48	7.64	7.28	13.19	17.52	8.66	1	2424

B1CH

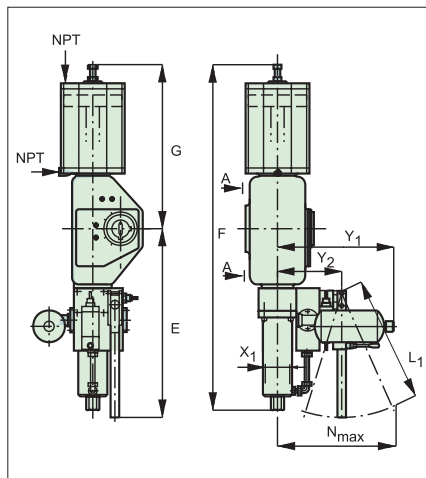


B1CH

Type	Dimensions, mm								NPT	kg
	E	F	G	L1	Nmax	Y1	Y2	X1		
B1CH11	828	785	375	700	536	410	211	50	3/8	59
B1CH13	856	875	445	700	536	410	211	50	3/8	74
B1CH17	885	990	555	700	536	410	211	50	1/2	100
B1CH20	921	1260	590	700	536	435	238	80	1/2	126
B1CH25	970	1445	725	700	536	435	238	80	1/2	172
B1CH32	1036	1900	920	700	598	540	273	125	3/4	347
B1CH40	1098	2200	1150	700	598	540	273	125	3/4	550
B1CH50	1191	2750	1390	700	621	690	296	160	1	1000
B1CH60	1191	2750	1390	700	621	690	296	160	1	1250
B1CH75	1191	2750	1390	700	621	690	296	160	1	1360

Type	Dimensions, inch								NPT	lbs
	E	F	G	L1	Nmax	Y1	Y2	X1		
B1CH11	32.60	30.90	14.80	27.56	21.10	16.14	8.31	1.97	3/8	130
B1CH13	33.70	34.50	17.50	27.56	21.10	16.14	8.31	1.97	3/8	163
B1CH17	34.84	39.00	21.90	27.56	21.10	16.14	8.31	1.97	1/2	220
B1CH20	36.26	49.60	23.20	27.56	21.10	17.13	9.37	3.15	1/2	278
B1CH25	38.19	56.90	28.50	27.56	21.10	17.13	9.37	3.15	1/2	379
B1CH32	40.79	74.80	36.20	27.56	23.54	21.26	10.75	4.92	3/4	765
B1CH40	43.23	86.60	45.30	27.56	23.54	21.26	10.75	4.92	3/4	1212
B1CH50	46.89	108.30	54.70	27.56	24.45	27.17	11.65	6.30	1	2204
B1CH60	46.89	108.30	54.70	27.56	24.45	27.17	11.65	6.30	1	2760
B1CH75	46.89	108.30	54.70	27.56	24.45	27.17	11.65	6.30	1	3000

B1JH

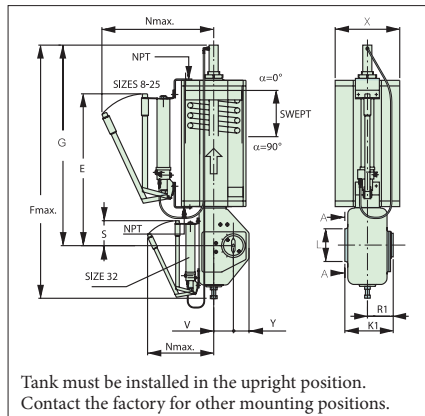


B1JH

Type	Dimensions, mm											NPT	kg
	X	G	F	E	N	V	Y	L	K1	R1	S		
B1JH8	135	585	720	517	720	43	50	80	140	81	80	3/8	30
B1JH10	175	630	790	552	740	51	50	95	154	89	80	3/8	43
B1JH12	215	745	940	623	765	65	65	120	190	109	120	1/2	70
B1JH16	265	940	1170	665	800	78	70	137	222	126	120	1/2	115
B1JH20	395	1075	1365	785	880	97	80	145	262	147	145	3/4	190
B1JH25	505	1405	1755	910	955	121	110	180	304	166	180	3/4	370
B1JH32	540	1635	2085	245	850	153	146	280	379	204	210	1	700
B1JH40	724	1906	2424	242	880	194	185	335	445	220	298	1	1125

Type	Dimensions, inch											NPT	lbs
	X	G	F	E	N	V	Y	L	K1	R1	S		
B1JH8	5.31	23.03	28.3	20.35	28.35	1.69	1.97	3.15	5.5	3.2	3.15	3/8	66
B1JH10	6.89	24.80	31.1	21.73	29.13	2.01	1.97	3.74	6.1	3.5	3.15	3/8	95
B1JH12	8.46	29.33	37.0	24.53	30.12	2.56	2.56	4.72	7.5	4.3	4.72	1/2	154
B1JH16	10.43	37.01	46.1	26.18	31.50	3.07	2.76	5.39	8.7	5.0	4.72	1/2	253
B1JH20	15.55	42.32	53.7	30.91	34.65	3.82	3.15	5.71	10.3	5.8	5.71	3/4	419
B1JH25	19.88	55.31	69.1	35.83	37.60	4.76	4.33	7.09	12.0	6.5	7.09	3/4	815
B1JH32	21.26	64.37	82.1	49.02	33.46	6.02	5.75	11.0	14.9	8.0	8.27	1	1543
B1JH40	28.5	75	95.4	9.5	34.6	7.6	7.3	13.2	17.5	8.7	11.7	1	2478

B1JR/B1JRR

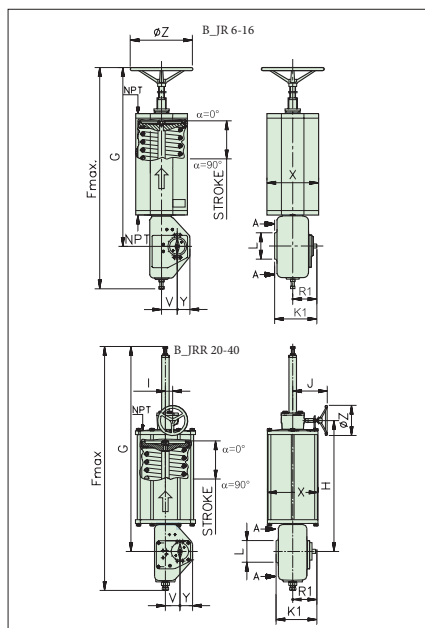


B1JR/B1JRR

Type	Dimensions, mm												NPT	kg
	X	Z	G	F	H	I	J	V	Y	L	K1	R1		
B1JR6	110	250	520	640	-	-	-	36	47	70	138	80	3/8	15.5
B1JR8	135	250	570	705	-	-	-	43	50	80	140	81	3/8	19
B1JR10	175	250	695	855	-	-	-	51	50	95	154	89	3/8	33
B1JR12	215	250	805	1000	-	-	-	65	65	120	190	109	1/2	60
B1JR16	265	400	1080	1310	-	-	-	78	70	137	222	126	1/2	106
B1JRR20	395	200	1455	1745	868	48.25	230	97	80	145	262	147	3/4	210
B1JRR25	505	250	1665	2015	1074	48.25	280	121	110	180	304	166	3/4	380
B1JRR32	540	400	1895	2345	1306	48.25	375	153	146	280	379	204	1	705
B1JRR40	724	400	2193	2710	1516	48.25	445	194	185	335	445	20	1	1130

Type	Dimensions, inch												NPT	lbs
	X	Z	G	F	H	I	J	V	Y	L	K1	R1		
B1JR6	4.33	9.84	20.47	25.20	-	-	-	1.42	1.85	2.76	5.43	3.15	3/8	34
B1JR8	5.3	9.8	22.4	27.8	-	-	-	1.7	2.0	3.1	5.5	3.2	3/8	42
B1JR10	6.9	9.8	27.4	33.7	-	-	-	2.0	2.0	3.7	6.1	3.5	3/8	73
B1JR12	8.5	9.8	31.7	39.4	-	-	-	2.6	2.6	4.7	7.5	4.3	1/2	132
B1JR16	10.4	15.7	42.5	51.6	-	-	-	3.1	2.8	5.4	8.7	5.0	1/2	233
B1JRR20	15.6	7.9	57.3	68.7	34.2	1.9	9.1	3.8	3.1	5.7	10.3	5.8	3/4	463
B1JRR25	19.9	9.8	65.6	79.3	42.3	1.9	11.0	4.8	4.3	7.1	12.0	6.5	3/4	837
B1JRR32	21.3	15.7	74.6	92.3	51.4	1.9	14.8	6.0	5.75	11.0	14.9	8.0	1	1553
B1JRR40	28.5	15.7	86.3	106.7	59.7	1.9	17.5	7.6	7.3	13.2	17.5	8.7	1	2489

B1JAR/B1JARR

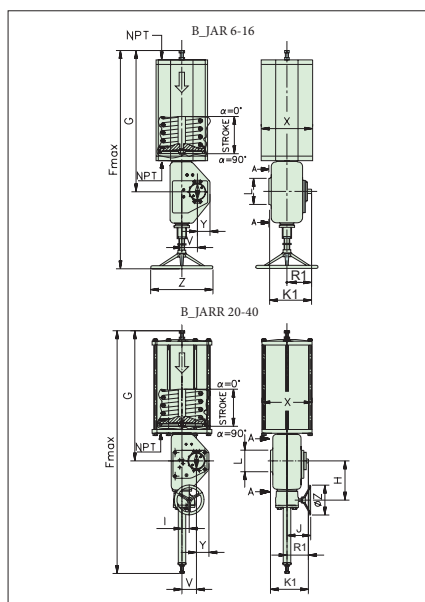


B1JAR/B1JARR

Type	Dimensions, mm												NPT	kg
	X	Z	G	F	H	I	J	V	Y	L	K1	R1		
B1JAR6	110	250	367	655	-	-	-	36	47	70	138	80	3/8	15.5
B1JAR8	135	250	420	720	-	-	-	43	50	80	140	81	3/8	20
B1JAR10	175	250	480	870	-	-	-	51	50	95	154	89	3/8	30
B1JAR12	215	250	620	1030	-	-	-	65	65	120	190	109	1/2	55
B1JAR16	265	400	760	1345	-	-	-	78	70	137	222	126	1/2	100
B1JARR20	395	250	940	1785	285	48.25	175	97	80	145	262	147	3/4	210
B1JARR25	505	250	1140	2025	314	48.25	185	121	110	180	304	166	3/4	380
B1JARR32	540	400	1435	2385	381	48.25	240	153	146	280	379	204	1	705
B1JARR40	724	400	1578	2748	443	48.25	294	194	185	335	445	220	1	1130

Type	Dimensions, inch												NPT	lbs
	X	Z	G	F	H	I	J	V	Y	L	K1	R1		
B1JAR6	4.33	9.84	14.45	25.79	-	-	-	1.42	1.85	2.76	5.43	3.15	3/8	34
B1JAR8	5.3	9.8	16.5	28.3	-	-	-	1.7	2.0	3.1	5.5	3.2	3/8	44
B1JAR10	6.9	9.8	18.9	34.3	-	-	-	2.0	2.0	3.7	6.1	3.5	3/8	66
B1JAR12	8.5	9.8	24.4	40.6	-	-	-	2.6	2.6	4.7	7.5	4.3	1/2	121
B1JAR16	10.4	15.7	29.9	53.0	-	-	-	3.1	2.8	5.4	8.7	5.0	1/2	220
B1JARR20	15.6	9.8	37.0	70.3	11.2	1.9	6.9	3.8	3.1	5.7	10.3	5.8	3/4	463
B1JARR25	19.9	9.8	44.9	79.7	12.4	1.9	7.3	4.8	4.3	7.1	12.0	6.5	3/4	837
B1JARR32	21.3	15.7	56.5	93.9	15.0	1.9	9.4	6.0	5.75	11.0	14.9	8.0	1	1553
B1JARR40	28.5	15.7	62.1	108.2	17.4	1.9	11.6	7.6	7.3	13.2	17.5	8.7	1	2489

B1CR/B1CRR

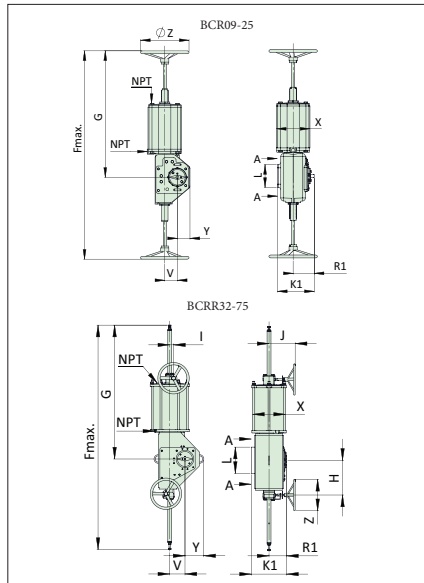


B1CR/B1CRR

Type	Dimensions, mm												NPT	kg
	X	Z	G	F	H	I	J	V	Y	L	K1	R1		
B1CR9	111	250	476	787	-	-	-	43	47	80	139	81	1/4	20
B1CR11	135	250	599	999	-	-	-	52	52	95	152	87	3/8	23
B1CR13	175	250	653	1075	-	-	-	65	65	117	190	109	3/8	37
B1CR17	215	250	735	1180	-	-	-	78	72	137	222	126	1/2	60
B1CR20	215	250	825	1359	-	-	-	97	83	143	246	131	1/2	80
B1CR25	265	430	1160	1958	-	-	-	121	104	177	304	166	1/2	150
B1CRR32	395	400	1532	2620	380	49	293	153	146	279	379	204	3/4	280
B1CRR40	475	400	1679	2832	443	49	333	194	240	335	449	224	3/4	470
B1CRR50	585	400	1946	3191	536	49	445	242	297	410	546	271	1	854
B1CRR60	685	400	2007	3245	536	49	469	242	297	410	546	271	1	1014
B1CRR75	780	400	2007	3245	536	49	513	242	297	410	546	271	1	1144

Type	Dimensions, inch												NPT	lbs
	X	Z	G	F	H	I	J	V	Y	L	K1	R1		
B1CR9	4.37	9.84	18.74	30.98	-	-	-	1.69	1.85	3.15	5.47	3.19	1/4	44
B1CR11	5.3	9.8	23.6	39.3	-	-	-	2	2	3.7	6	3.4	3/8	51
B1CR13	6.9	9.8	25.7	42.3	-	-	-	2.6	2.6	4.6	7.5	4.3	3/8	82
B1CR17	8.5	9.8	28.9	46.5	-	-	-	3.1	2.8	5.4	8.7	5	1/2	132
B1CR20	8.5	9.8	32.5	53.5	-	-	-	3.8	3.3	5.6	9.7	5.2	1/2	176
B1CR25	10.4	16.9	45.7	77.1	-	-	-	4.8	4.1	7	12	6.5	1/2	331
B1CRR32	15.6	15.7	60.3	103.1	15	1.9	11.5	6	5.7	11	14.9	8	3/4	617
B1CRR40	18.7	15.7	66.1	111.5	17.4	1.9	13.1	7.6	9.4	13.2	17.7	8.8	3/4	1036
B1CRR50	23	15.7	76.6	125.6	21.1	1.9	17.5	9.5	11.7	16.1	21.5	10.7	1	1883
B1CRR60	27	15.7	79	127.8	21.1	1.9	18.5	9.5	11.7	16.1	21.5	10.7	1	2235
B1CRR75	30.7	15.7	79	127.8	21.1	1.9	20.2	9.5	11.7	16.1	21.5	10.7	1	2522


Mounting face dimensions

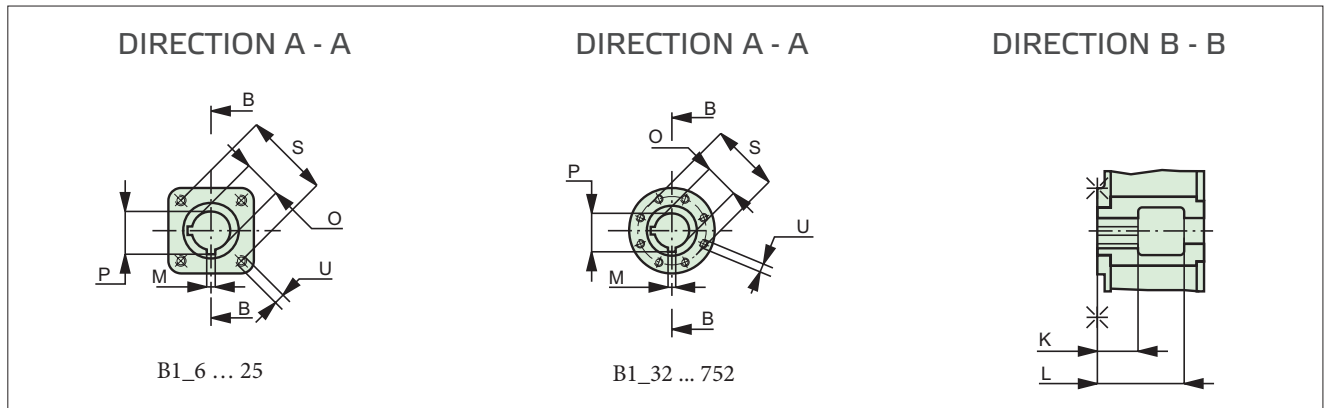

Actuator		Dimensions, mm									Mounting face
B1C	B1J	O (F8)	M	P	K (keyway)	L	S	U	N	Thread length	
6	6	15 20 25	4.76 4.76 6.35"	17.0 23.3 27.9	40	90	70	M8	4	16	F05, F07
9	8	15 20 25 35	4.76 4.76 6.35 9.52	17.0 23.3 27.9 39.3	50	90	70	M8	4	19	F07
11	10	20 25 35 40	4.76 6.35 9.52 9.52	23.3 27.9 39.3 44.4	60	105	102	M10	4	19	F10
13	12	55	12.70	60.8	75	130	125	M12	4	26	F12
17	16	55	12.70	60.8	80	160	140	M16	4	16	F14
20	20	70	19.05	78.3	105	195	140	M16	4	30	F14
25	25	95	22.22	105.5	140	235	165	M20	4	35	F16
32	32	105	25.40	116.3	155	280	254	M16	8	40	F25
40	40	95 105 120	22.22 25.40 31.75	105.5 116.3 133.9	180	340	298	M20	8	54	F30
50 60 75		120 135	31.75 31.75	133.9 149.2	200	430	356	M30	8	54	F35
	322	95 105 120	22.22 25.40 31.75	105.5 116.3 133.9	180	320	298	M20	8	65	F30
502 602 752		120 135 150 165 180	31.75 31.75 38.10 44.45	133.9 149.2 166.8 182.0 199.4	250	470	406	M36	8	70	F40

Actuator		Dimensions, inch									Mounting face
B1C	B1J	O (F8)	M	P	K (keyway)	L	S	U	N (pcs.)	Thread length	
6	6	0.59 0.79 0.98	0.19 0.19 0.25	0.67 0.92 1.10	1.57	3.54	2.76	M8	4	0.62	F05, F07
9	8	0.59 0.79 0.98 1.38	0.19 0.19 0.25 0.37	0.67 0.92 1.10 1.55	1.97	3.54	2.76	M8	4	0.74	F07
11	10	0.79 0.98 1.38 1.57	0.19 0.25 0.37 0.37	0.92 1.10 1.55 1.75	2.36	4.13	4.02	M10	4	0.74	F10
13	12	2.17	0.50	2.39	2.95	5.12	4.92	M12	4	1.02	F12
17	16	2.17	0.50	2.39	3.15	6.30	5.51	M16	4	1.02	F14
20	20	2.76	0.75	3.08	4.13	7.68	5.51	M16	4	1.18	F14
25	25	3.74	0.87	4.15	5.51	9.25	6.50	M20	4	1.38	F16
32	32	4.13	1.00	4.58	6.10	11.02	10.00	M16	8	1.57	F25
40	40	3.74 4.13 4.72	0.87 1.00 1.25	4.15 4.58 5.27	7.09	13.39	11.73	M20	8	2.13	F30
50 60 75		4.72 5.31	1.25 1.25	5.27 5.87	7.87	16.93	14.02	M30	8	2.13	F35
	322	3.74 4.13 4.72	0.87 1.00 1.25	4.15 4.58 5.27	7.09	12.60	11.73	M20	8	2.56	F30
502 602 752		4.72 5.31 5.91 6.50 7.09	1.25 1.25 1.50 1.50 1.75	5.27 5.87 6.57 7.17 7.85	9.84	18.50	15.98	M36	8	2.76	F40

Accessories mounting face dimensions

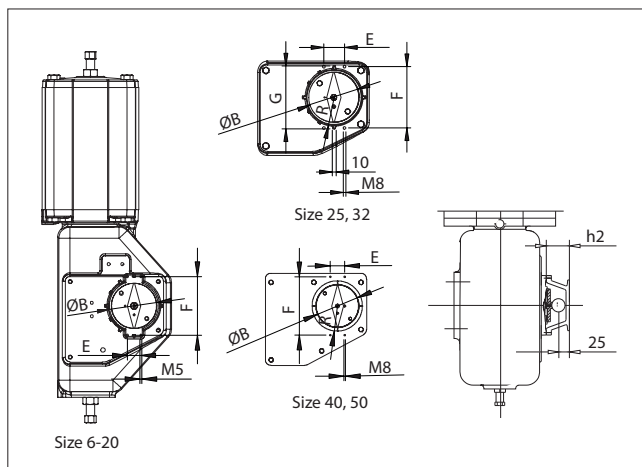

Actuator size	E	F	h2	B	R
6	30	80	45	45	-
8, 9	30	80	45	55	-
10, 11	30	80	45	60	-
12, 13	30	130	55	80	-
16, 17	30	130	55	80	-
20	30	130	55	100	-
25	54	160	55	130	83
32	54	188	55	150	96
40	64	260	55	190	115
50	64	290	55	210	130

How to order

Pneumatic double-acting cylinder actuator, series B1C

1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.
B1	C	-	S	Y	U	40/120	HL	E	X	-

Signs 1, 2, 6 and 7 are obligatory: other marks are options

1. sign	PRODUCT GROUP
B1	Cylinder actuator with attachment dimensions acc. to ISO 5211.

2. sign	SERIES
C	Double acting, pneumatic, protection class IP66.

3. sign	CONSTRUCTIONS
-	Standard construction without sign.
H	Manual hydraulic override. N/A for arctic model.

4. sign	CYLINDER AND HOUSING MATERIALS
-	Aluminium cylinder. EN 1561-GJL-200 housing and piston, except if sign 8 is "A".
S	Carbon steel cylinder. EN 1561-GJL-200 housing and piston, except if sign 8 is "A".
B	Aluminum cylinder. EN 1563-GJS-400-15 housing and piston. When sign 8 is "A", then this material always applies to housing and piston (Not available with B1C size 6).
X	Carbon steel cylinder. EN 1563-GJS-400-15 housing and piston. (Not available with B1C size 6).

5. sign	SPECIAL CONSTRUCTION
-	Standard construction without sign
D	Simple service lock-to-close device at housing end. Safety locking during maintenance to <u>close</u> position with padlock.
Q	Service lock-up device for housing end. Safe locking during maintenance to <u>close</u> position.
W	Service lock-up device for cylinder end. Safe locking during maintenance to <u>open</u> position.
QW	Service lock-up device for housing & cylinder end. Safe locking during maintenance to <u>close & open</u> position.
Z	Shock absorber on cylinder end (-20 to +120 °C).
N	Shock absorber on housing end (-20 to +120 °C).
P	Automatic latching device for closed position, designed for locking of capping valves.
T	Manual latching device for partial stroke test.
K	Handwheel on cylinder end (sizes 9 to 25).
L	Handwheel on housing end (sizes 9 to 25).
R	Handwheel both on cylinder end and housing end (sizes 9 to 25).
RK	Handwheel on cylinder end with wormgear (sizes 32 - 75). Not used in 502, 602 and 752.
RL	Handwheel on housing end with wormgear (sizes 32 - 75). Not used in 502, 602 and 752.
RR	Handwheel both on cylinder end and housing end with wormgear (sizes 32 - 75). Not used in 502, 602 and 752.
Y	Special, to be specified, e.g. special material.

6. sign	INTERFACE FOR ADDITIONAL DEVICES (positioner, limit switch)
U	Standard interface according to VDI/VDE 3845.

7. sign	ACTUATOR SIZE
	6/15 6/20 6/25 - 9/15 9/20 9/25 9/35 - 11/20 11/25 11/35 11/40 - 13/55 - 17/55 - 20/70 - 25/95 - 32/105 - 40/95 40/105 40/120 - 50/120 50/135 - 502/120 502/135 502/150 502/165 502/180 Special sizes 50 & 502 with oversized cylinder: 60, 602, 75, 752 E.g. 20 / 70 = actuator size / shaft bore diameter

8. sign	MATERIALS OF SEALS AND BEARINGS (all versions ATEX II 2 G/D h and ATEX II 3 G/D h)
-	Standard construction without sign (-20° to +70 °C).
HL	For temperatures -20 ... +120 °C and long-run option L.
CL	For temperatures -40 ... +70 °C, and long-run option L.
A	For temperatures -55 ... +70 °C, Arctic service model. Not available for size 6, or if sign 3 is "H".
F	Oversized NPT connections: fast operation.
F1	Large oversized NPT connections: faster operation.
S	Super long-run option. (-20 ... +70 °C)
L	Long-run option.

9. sign	SCREW MATERIAL
-	Stainless steel for sizes 6-32 with aluminum cylinder. Steel, zinc-coated & passivated for sizes 40 and bigger with aluminum cylinder. Steel, zinc-coated & passivated for all sizes with carbon steel cylinder.
E	Stainless steel for sizes 40 and bigger with aluminum cylinder. Stainless steel for all sizes with carbon steel cylinder.

10. sign	NON-STANDARD OPERATION RANGE (without sign, standard operation range is 0° - 90°)
X	Valve closed position can be limited to any angle. X can be any value between 0° - 90° For example, when X = 30, valve stops at 30° (never fully closed).
Z	Valve open position can be limited to any angle. Z can be any value between 0° - 90° For example, when Z = 70, valve stops at 70° (never fully open).

11. sign	SPECIAL CONSTRUCTION / MODEL VERSION
6	Protection class IP66M
G	Oxygen service model
T	Tropicalization
-	No sign = B1 actuator model A
/B	B1 actuator model B

How to order

Pneumatic, single-acting cylinder actuator, series, B1J and B1JA

1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.	13.
B1	J	K	A	R	S	Y	U	20/70	HL	E	Z	-

Signs 1, 2, 8 and 9 are obligatory, other signs are options

1. sign	PRODUCT GROUP
B1	Cylinder actuator with attachment dimensions acc. to ISO 5211.

2. sign	SERIES
J	Pneumatic, spring-return, protection class IP66.

3. sign	SPRING OPTIONS
-	Standard spring without sign.
K	Light spring.
V	Strong spring.

4. sign	FUNCTION CODE
-	Spring-to-close operation, without sign.
A	Spring-to-open operation.

5. sign	CONSTRUCTION
-	Standard construction without sign.
R	Straight spindle handwheel operation (sizes 6 - 16).
RR	Side mounted handwheel with wormgear (sizes 20 - 40).
H	Manual hydraulic override. N/A if size 6 or arctic model

6. sign	CYLINDER AND HOUSING MATERIALS
-	Aluminum cylinder. EN 1561-GJL-200 housing and piston, except if sign 10 is "A".
S	Carbon steel cylinder. EN 1561-GJL-200 housing and piston, except if sign 10 is "A".
B	Aluminum cylinder. EN 1563-GJS-400-15 housing and piston. When sign 10 is "A", then this material always applies to housing and piston.
X	Carbon steel cylinder. EN 1563-GJS-400-15 housing and piston.

7. sign	SPECIAL CONSTRUCTION
-	Standard construction without sign.
D	Simple service lock-to-close device at housing end. Safety locking during maintenance to <u>close</u> position with padlock.
Q	Service lock-up device for housing end. Safe locking during maintenance to <u>closed</u> position.
W	Service lock-up device for cylinder end. Safe locking during maintenance to <u>open</u> position.
Z	Shock absorber on cylinder end (-20 to +120 °C).
N	Shock absorber on housing end (-20 to +120 °C).
QW	Service lock-up device for housing & cylinder end. Safe locking during maintenance to <u>close & open</u> position.
T	Manual latching device for partial stroke test. The actuator can be locked in series B1J for <u>open</u> position and in series B1JA for <u>closed</u> position allowing about 20 degrees' motion. Not available with B1J(A)6.
Y	Special, to be specified e.g. special material.

8. sign	INTERFACE FOR ADDITIONAL DEVICES (positioner, limit switch)
U	Standard interface according to VDI/VDE 3845.

9. sign	ACTUATOR SIZE
-	6/15 6/20 6/25 - 8/15 8/20 8/25 8/35 - 10/20 10/25 10/35 10/40 - 12/55 - 16/55 - 20/70 - 25/95 - 32/105 - 40/95 40/105 40/120 - 322/95 322/105 322/120 E.g. 20 / 70 = actuator size / shaft bore diameter

10. sign	MATERIALS OF SEALS AND BEARINGS (all versions ATEX II 2 G/D h and ATEX II 3 G/D h)
-	Standard construction without sign (-20° to +70 °C).
HL	For temperatures -20 ... +120 °C and long-run option L.
CL	For temperatures -40 ... +70 °C, and long-run option L.
A	For temperatures -55 ... +70 °C, Arctic service model. Not available if 5. sign "H"
F	Oversized NPT connections: fast operation. N/A if size 6.
F1	Oversized NPT connections: faster operation. N/A if size 6.
F2	Largest oversize NPT connections: fastest operation. Not available with B1J(A)6
S	Super long-run option. (-20 ... +70 °C)
L	Long-run option

11. sign	SCREW MATERIAL
-	Stainless steel for sizes 6-20 with aluminum cylinder. Steel, zinc-coated & passivated for sizes 25 and bigger with aluminum cylinder. Steel, zinc-coated & passivated for all sizes with carbon steel cylinder.
E	Stainless steel for sizes 25 and bigger with aluminum cylinder. Stainless steel for all sizes with carbon steel cylinder.

12. sign	NON-STANDARD OPERATION RANGE (without sign, standard operation range is 0° - 90°)
X	Valve closed position can be limited to any angle. X can be any value between 0° - 90° For example, when X = 30, valve stops at 30° (never fully closed).
Z	Valve open position can be limited to any angle. Z can be any value between 0° - 90° For example, when Z = 70, valve stops at 70° (never fully open).

13. sign	SPECIAL CONSTRUCTION / MODEL VERSION
6	Protection class IP66M
G	Oxygen service model
T	Tropicalization
-	No sign = B1 actuator model A
/B	B1 actuator model B

APPENDIX:

B1 actuator version model B

All B1 actuators manufactured since start of Q3 / 2025 will feature increased tightness and protection from environmental conditions. This is enabled by using selected new parts inside the actuator that are optimized for increased endurance and performance. This update is especially beneficial for actuators used in humid conditions. All spare parts between model A and model B are interchangeable. All future spare parts sold by Valmet Flow Control will feature only model B spare parts, so the increased protection level will be eventually applied to all installed base of B1 series during their next regular maintenance.

Subject to change without prior notice.

Neles, Neles Easyflow, Jamesbury, Stonel, Valvcon and Flowrox, and certain other trademarks, are either registered trademarks or trademarks of Valmet Oyj or its subsidiaries in the United States and/or in other countries.

Valmet Flow Control Oy

Vanha Porvoontie 229, 01380 Vantaa, Finland.

Tel. +358 10 417 5000.

www.valmet.com/flowcontrol

